



Installation Instruction for CMAX-DMF-43-UW-I53-01



CMAX-DMF-43-UW-I53-01

Document Number: **M0153AG**

Document Revision: **02**

Date: **March 2026**

Copyright © 2026 ANDREW[®], an Amphenol company. All Rights Reserved.

This document has been developed by ANDREW, an Amphenol company, and is intended for the use of its customers and customer support personnel. The specifications and information regarding the products in this manual are subject to change without notice. All statements, information, and recommendations in this manual are believed to be accurate but are presented without warranty of any kind, express or implied. Users must take full responsibility for their application of any products.

The software license and limited warranty for the accompanying product are set forth in the information packet that shipped with the product and are incorporated herein by reference. If you are unable to locate the software license or limited warranty, contact your ANDREW sales representative for a copy.

Andrew Wireless Systems GmbH, 25-March-2026

TABLE OF CONTENTS

1. INSTALLATION	4
1.1. INSTALLATION PREPARATIONS	4
1.2. ANTENNA MOUNTING	4
1.3. WALL MOUNTING	5
1.4. POLE MOUNTING	6
1.4.1. Preparations	6
1.4.2. Inserting Bolts	7
1.4.3. Mounting the Antenna	8
1.5. ANGLE ADJUSTMENT	9
1.5.1. Azimuth Angle	9
1.5.2. Elevation Angle	9
2. CONTACTING ANDREW	10
2.1. TECHNICAL SUPPORT	10
2.2. WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT RECYCLING	10
2.3. TECHNICAL TRAINING	11
2.4. ACCESSING USER DOCUMENTATION	11

LIST OF CHANGES

Version	Changes	Release Date
M0153AGB		08-October-2024
M0153AGC	- Branding and contact information updated - Bending radius added to installation preparations	25-March-2026

1. Installation


1.1. Installation Preparations

- This antenna is designed for indoor use only.
- Please read the complete description before starting the installation.
- Observe that the bending radius of the cables must not be less than 40 mm.
- Make sure that connectors are properly sealed against water if no cables are connected to them after the installation.
- Tools required: Wrench, width: 8 mm & 10 mm




1.2. Antenna Mounting

Proceed as follows to mount the CMAX-DMF-43-UW-I53-01:

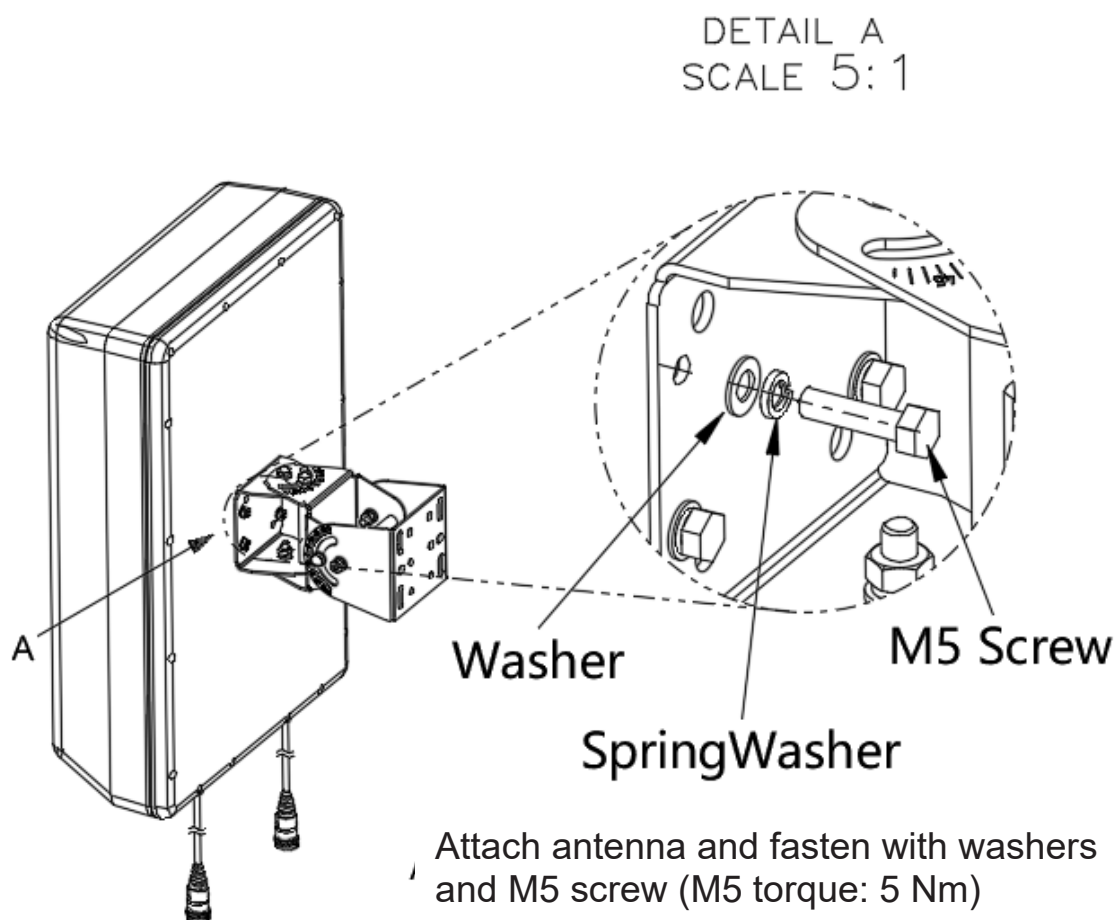

1.3. Wall Mounting

To mount the CMAX-DMF-43-UW-I53-01 antenna to a wall (pole mounting see next chapter), proceed as follows:

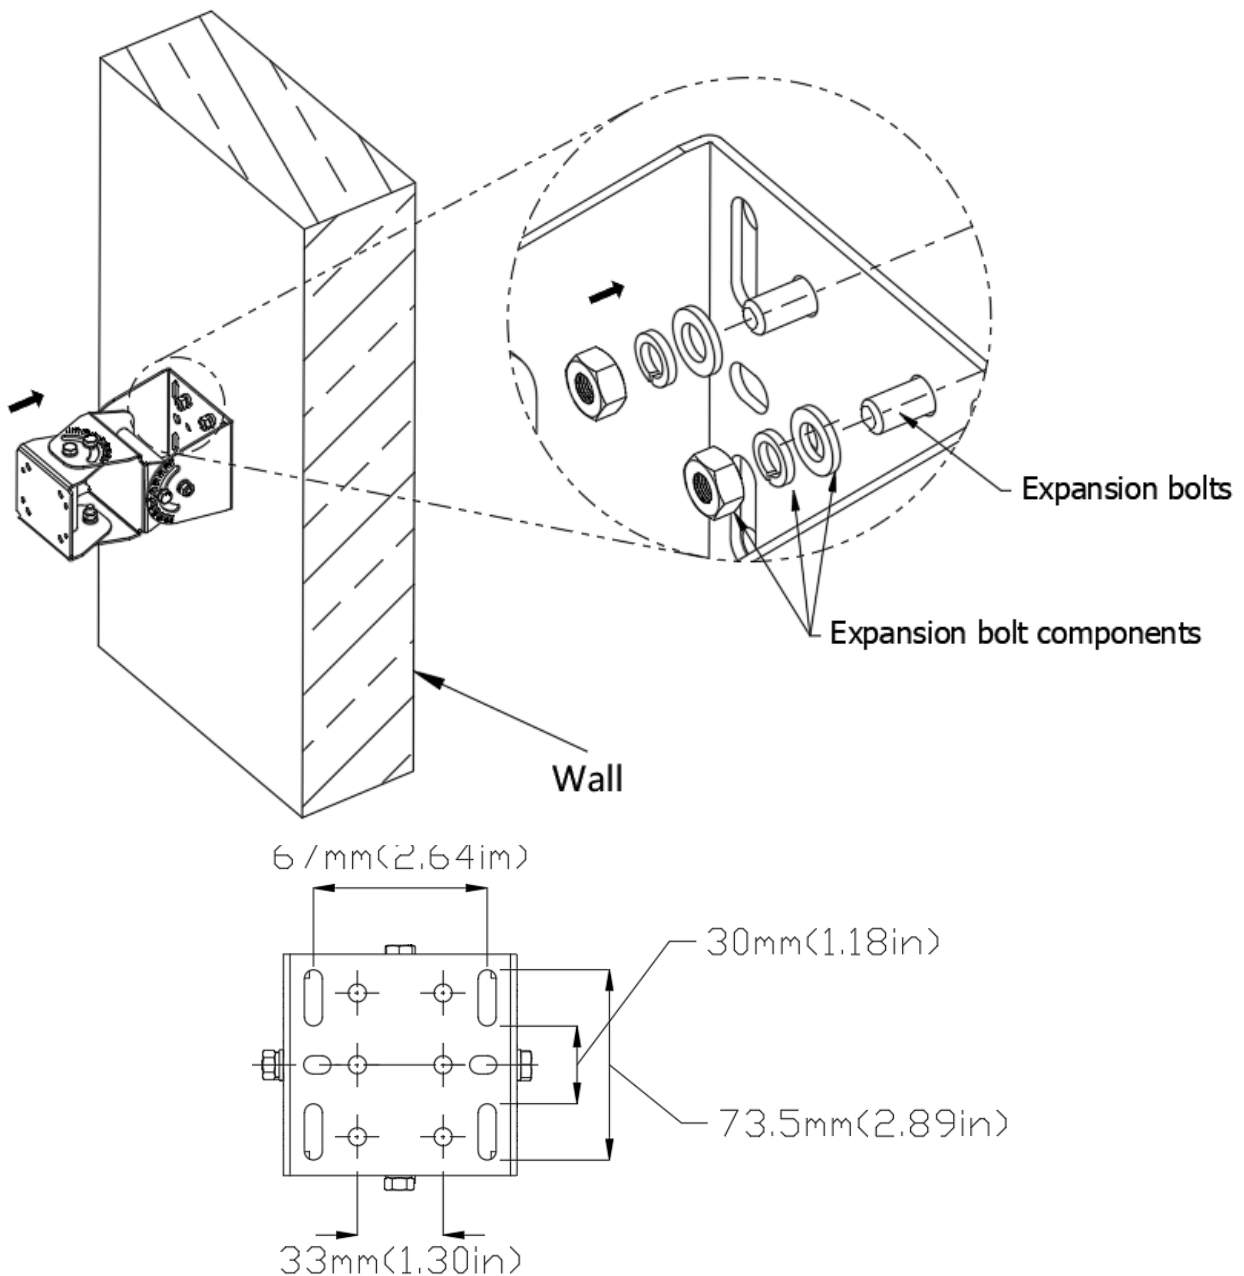


1. Mark 4 holes onto the wall as shown in the drawing above.
 2. Drill four holes into the wall and insert appropriate expansion bolts into the holes.
 3. Attach the antenna pedestal.
- (Note: Expansion bolt parts have to be provided by the user.)

1.4. Pole Mounting


Alternatively, a pole-mounting kit is also part of the delivery. The recommended pole diameter for this mounting kit is 35 - 60 mm. To mount an antenna to a pole using this kit, proceed as described in the following:

1.4.1. Preparations

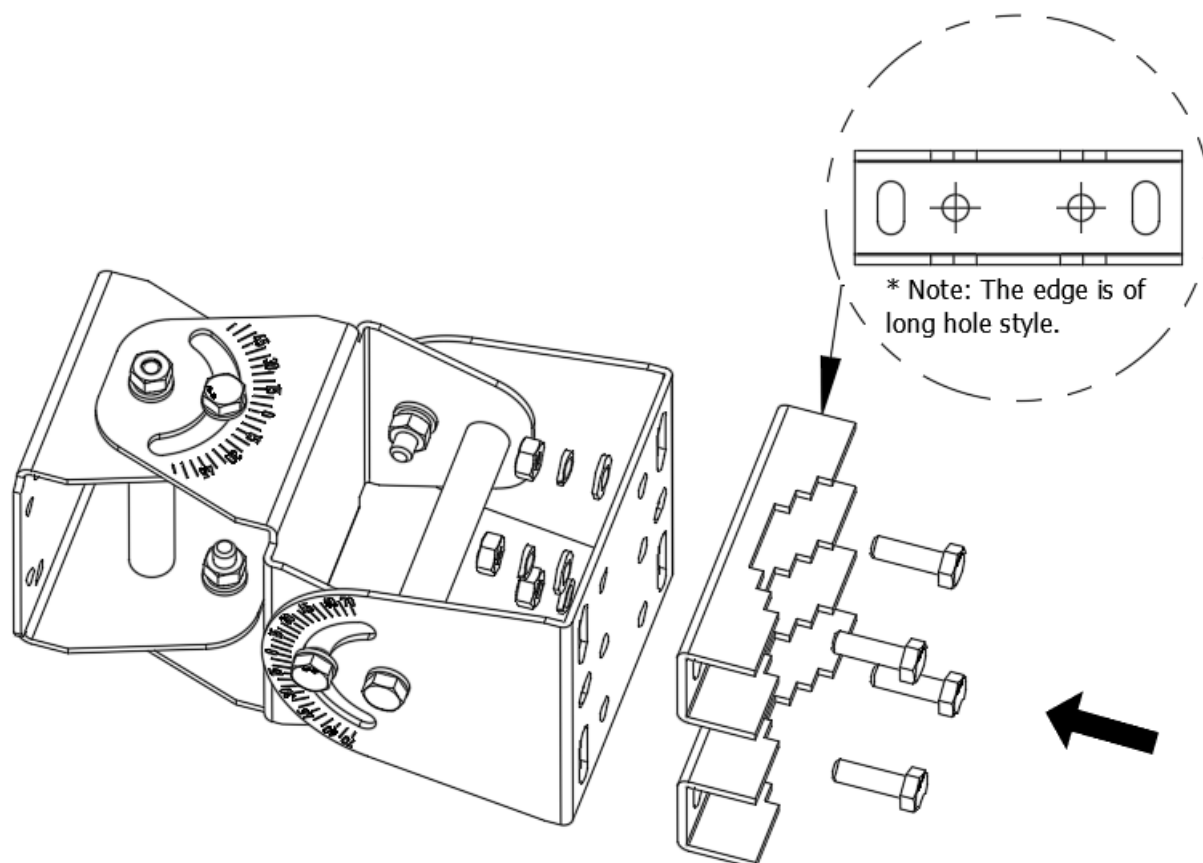

1. Install the two splints on the main body of the support, and install them in the front direction of the picture with four M6*20 screws, washers, spring washers, and nuts.
2. Tighten the four M6 nuts observing the specified torque of 10 Nm.


1.4.2. Inserting Bolts

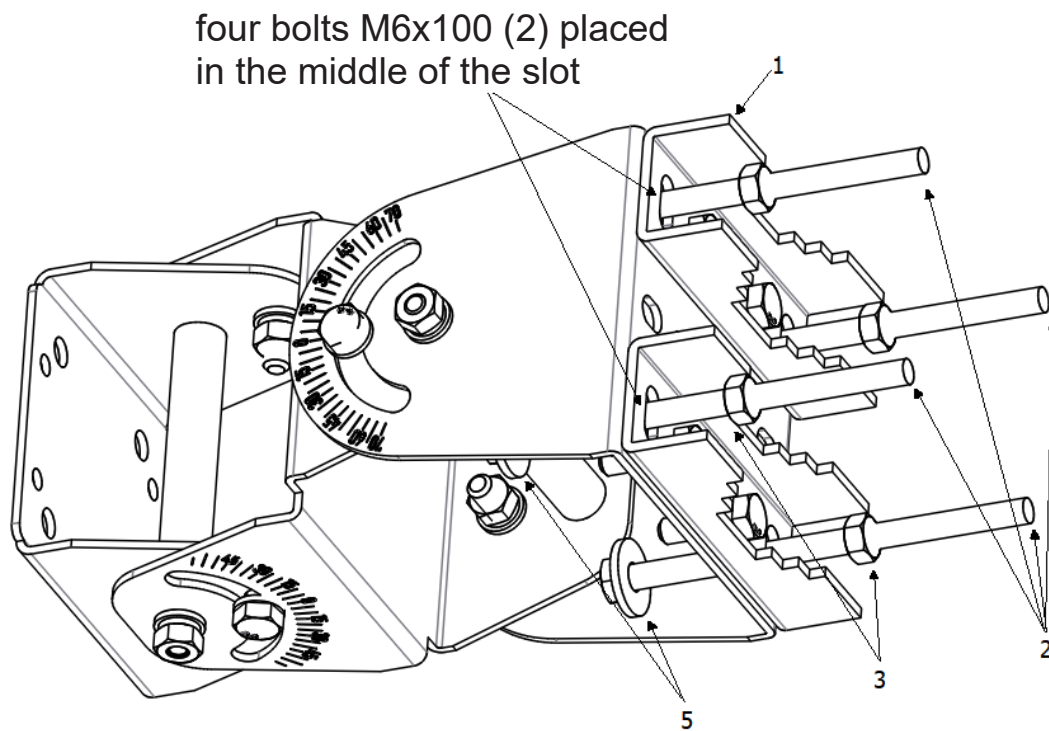

Insert four M6x100 (2) bolts and four filled-corner washers (5) into the antenna mounting bracket, then tighten the four M6 nuts (3), four M6x100 (2) placed in the middle of the slot.

1.4.3. Mounting the Antenna

To mount the antenna to a pole, proceed as follows:

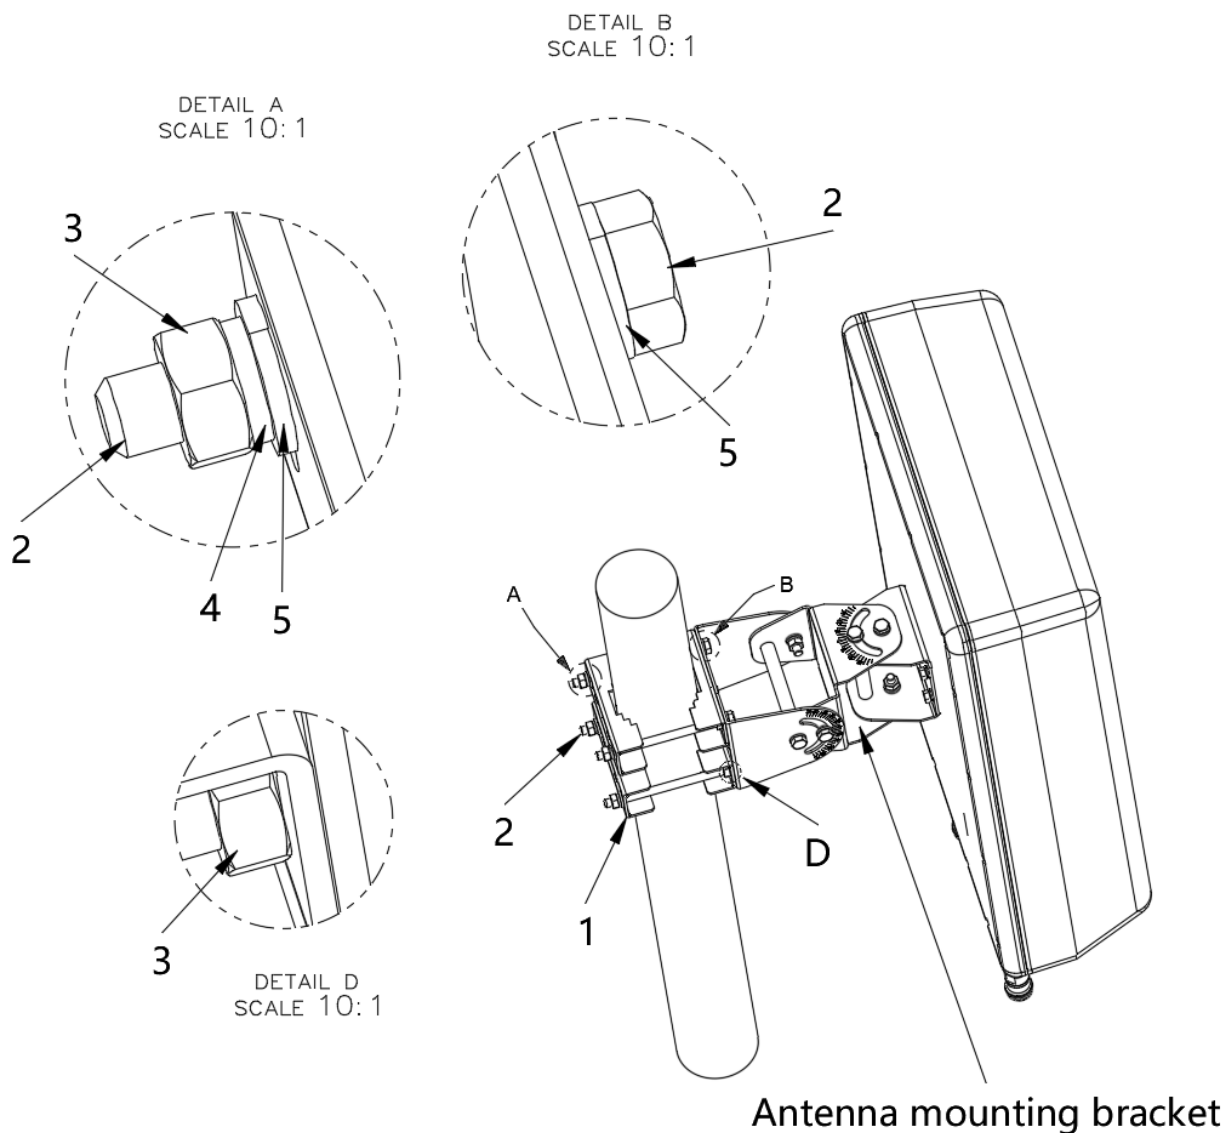


1. Insert the pole mounting bracket into these four bolts and place the washers & spring washers (4 & 5) and the M6 nuts (3) over each bolt.
2. Tighten the four M6 nuts observing the specified torque of 10 Nm.

Note: (5) is a gasket M6*18*2mm (screw specification * outer diameter * thickness).

1.5. Angle Adjustment

1.5.1. Azimuth Angle

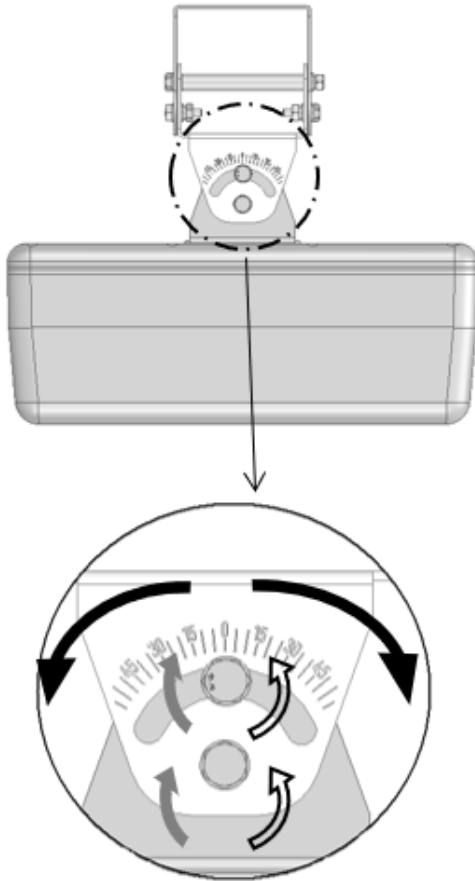

1. Loosen the three fixing screws at the top and bottom side. (Do not unscrew them completely.)




2. Adjust your desired angle. The complete antenna pedestal can be swivelled to the left-/right-hand side by up to 40°.



3. Tighten the fixing screws.



1.5.2. Elevation Angle

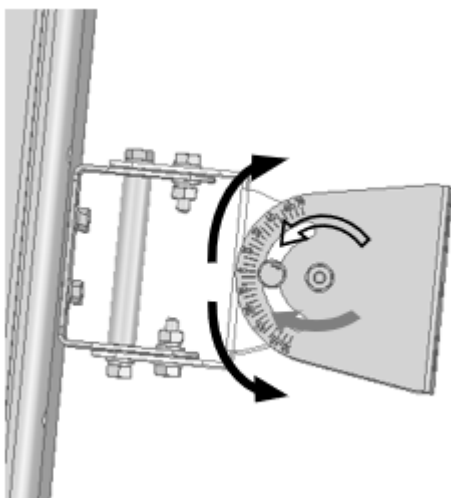

1. Loosen the three fixing screws at the left- and right-hand side. (Do not unscrew them completely.)



2. Adjust your desired angle. The complete antenna pedestal can be swivelled to the up-/downside by up to 40°.



3. Tighten the fixing screws.



2. Contacting ANDREW

The following sections tell you how to contact ANDREW® for additional information or for assistance.

2.1. Technical Support

This section tells you how to contact the ANDREW Technical Support team. Support is available 7 days a week, 24 hours a day.

Telephone Helplines

Use the following Helpline telephone numbers to get live support, 24 hours a day.

24X7 +1 888-297-6433 (Toll free for U.S. and Canada)

EMEA 8:00-17:00 (UTC +1) + 800 73732837 (Toll free for parts of EMEA and Australia)
+ 49 909969333 (Toll charge incurred)

Calls to an EMEA Helpline outside of the 8:00 to 17:00 time frame will be forwarded to the 24x7 Helpline.

Online Support

Click the link below or scan the QR code to the right to submit tickets using the online [Technical Support Form](#).



2.2. Waste Electrical and Electronic Equipment Recycling

In alignment with our commitment to the Waste Electrical and Electronic Equipment (WEEE) Directive, we design and manufacture our products with sustainability as a priority. We are dedicated to supporting responsible end-of-life disposal and recycling practices, which help reduce environmental impact and promote a circular economy.

To learn more, scan the QR code to the right or click the link below:

<https://www.andrew.com/sustainability/environment/weee/>



2.3. Technical Training

1. To access training on the online technical training site, please click <https://www.andrew.com/support/training/> or scan the QR code to the right:
2. From here you can see course catalogs, training calendars, and visit the training portal that lets you register for online and instructor-led courses and take online courses.
3. Instructor-led courses are conducted in North America and Europe. Before choosing a course, please verify the region.
4. For training related questions, please contact us:
icn_training@andrew.com



2.4. Accessing User Documentation

1. Access to the Customer Portal requires a user account. If you don't have an account:
 - Visit My ANDREW at <https://www.andrew.com/membership> or by scanning the QR code to the right.
 - Click “New user registration” and follow the prompts.
 - After you have registered in My ANDREW, click the **Request access** button for the **Customer Portals**.
 - After having done the request, it might take several days to get approved. Then, you can select the **Indoor Wireless Resource Center for ANDREW** from the list of applications.
2. To go directly to the portal, where you can access the DAS-user documentation, scan the QR Code to the right.
Alternatively, visit My ANDREW (see above) and use the **Indoor Wireless Resource Center for ANDREW** application.
3. In Tools and Documentation, search by product, document category, or title.
4. Click on the title of any document to open it.

