

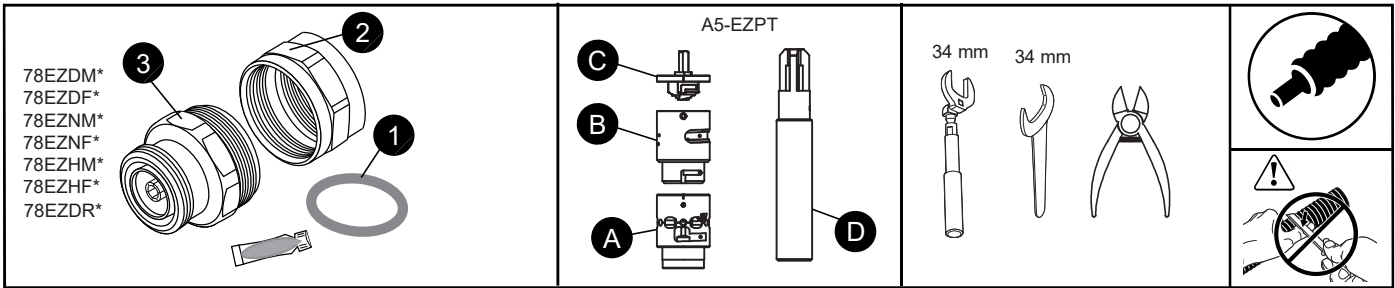
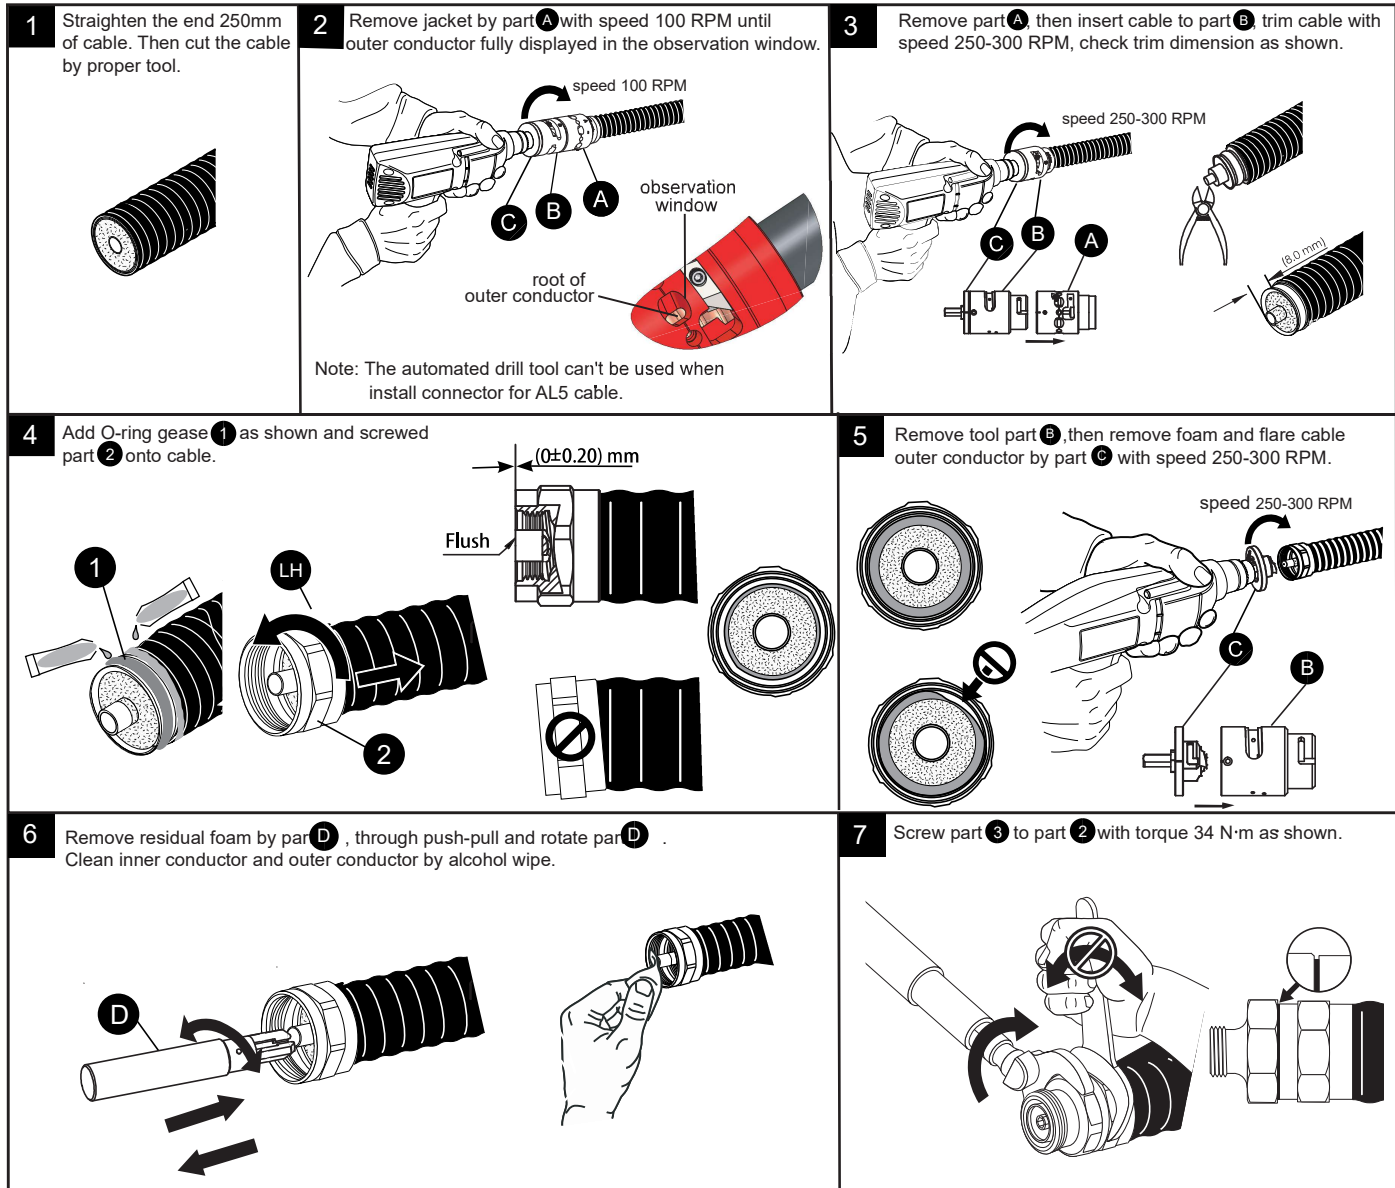


7/8" EZfit® Series Connectors

for HELIAX® AVA5 Series Cables - Automatic Tool A5-EZPT



DIN 18-22 lb-ft (25-30 N·m)
N 15-20 lb-in (1.7-2.3 N·m)
4.3-10 44-70 lb-in (5-8 N·m)



7/8" EZfit® Series Connectors


Bulletin 7864790 Revision A Page 2 of 3

for HELIAX® AVA5 Series Cables - Automatic Tool A5FX-EZPT

	<p>A5FX-EZPT</p> <p>222951</p>	<p>#18 Masonry String</p> <p>34 mm 34 mm</p>	
<p>1 Strength cable and remove jacket 51mm as picture shown. Cut down cable as picture shown.</p> <p>51mm</p> <p>OR</p> <p>Strength cable and remove jacket 14mm as picture shown. Cut down cable as picture shown.</p> <p>14mm</p>	<p>2 Trim cable by Auto-cable preparation tool part A.</p> <p>Note: The automated drill tool can't be used when install connector for AL5 cable.</p>	<p>3 Check cable inner conductor dimension as shown.</p> <p>8.0 mm</p>	
<p>4 Remove extra foam by #18 Masonry String . Check cable outer conductor dimension.</p> <p>8.0 mm</p>	<p>5 Add O-ring gease 1 as shown and screwed part 2 onto cable.</p> <p>1</p> <p>LH</p> <p>Flush</p> <p>2</p> <p>(0±0.20) mm</p>		
<p>6 Use part B to remove foam and flare cable outer conductor.</p> <p>B</p>	<p>7 Clean inner conductor and outer conductor by alcohol wipe.</p>	<p>8 Screw part 3 to part 2 with torque 34 N·m as shown.</p>	

7/8" EZfit® Series Connectors

for HELIAX® AVA5 Series Cables - Manual Tool 78-HPT

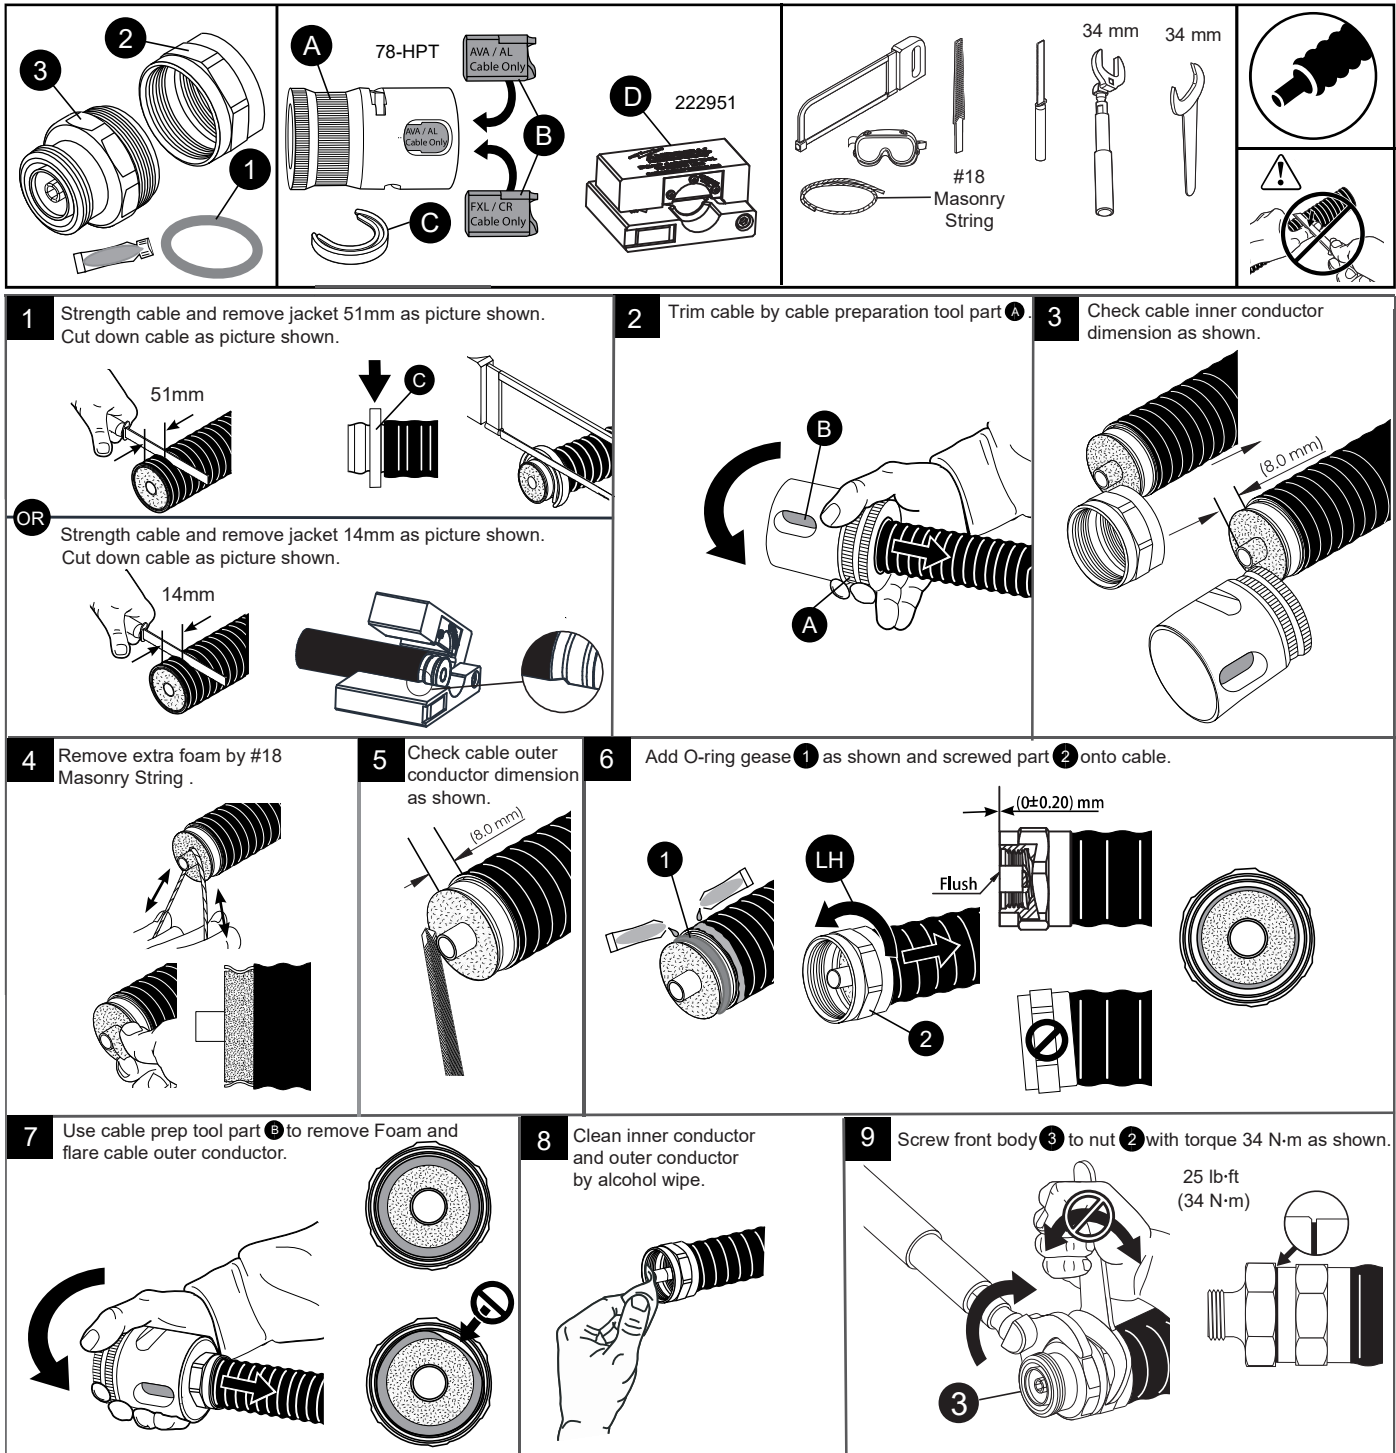

NOTE: Connector interface threads and O-rings are designed for mate ability without ANY supplementary treatment to threads or O-rings. If any type of supplementary lubricants/oils are used, the warranty will be void, and connector/assembly performance may be affected.

Patent number: 7,419,403

ANDREW an Amphenol company
2601 Telecom Parkway, Richardson, Texas, 75082, USA
www.andrew.com

Technical Support
+1 888 297 6433, Option 3 (Toll Free US and Canada)
awpnarsupport@andrew.com

Notice: ANDREW disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.
Aviso: ANDREW no acepta ninguna obligación ni responsabilidad como resultado de prácticas incorrectas o peligrosas de instalación, inspección, mantenimiento o retiro.
Avis: ANDREW décline toute responsabilité pour les conséquences de procédures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.
Hinweis: ANDREW lehnt jede Haftung oder Verantwortung für Schäden ab, die aufgrund unsachgemäßer Installation, Überprüfung, Wartung oder Demontage auftreten.
Atenção: A ANDREW abdica do direito de toda responsabilidade pelos resultados de práticas inadequadas e sem segurança de instalação, inspeção, manutenção ou remoção.
Avvertenza: ANDREW declina eventuali responsabilità derivanti dall'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.
注意: ANDREW 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負責任。何義務和責任。

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.