





- 1.0 GENERAL NOTES
 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
 1.2 FOR PATENT INFO: <https://www.adwpat.com>

- 2.0 DESIGN NOTES
 2.1 ANY HAZARDS OR OBSTRUCTIONS TO THE CLIMBING FACILITY AND SAFETY CLIMB MUST BE IDENTIFIED PRIOR TO INSTALLING THE APPURTENANCE. ADDITIONAL PRODUCTS MAY BE REQUIRED TO MAINTAIN THE INTEGRITY OF THE SAFETY CLIMB. DURING INSTALLATION, TEMPORARY AND/OR PERMANENT PRECAUTIONARY MEASURES SHOULD BE TAKEN TO PRESERVE THE CLIMBING FACILITY AND/OR SAFETY CLIMB.

- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
 3.1 TIGHTEN ALL BOLTS 3/8" OR LARGER SECURING FLAT PLATES SNUG TIGHT. TIGHTEN ALL THREADED RODS SNUG TIGHT, WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THREADED ROD.
 3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
 3.3 FOR BOLTS IN A PATTERN, TIGHTEN IN A CRISS-CROSS OR STAR SEQUENCE, INCREASING TORQUE IN GRADUAL STEPS UNTIL SNUG TIGHT.

- 4.0 TEST
 5.0 PACKAGING
 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	NSUN 08DEC25	RM1270 50106581AMO

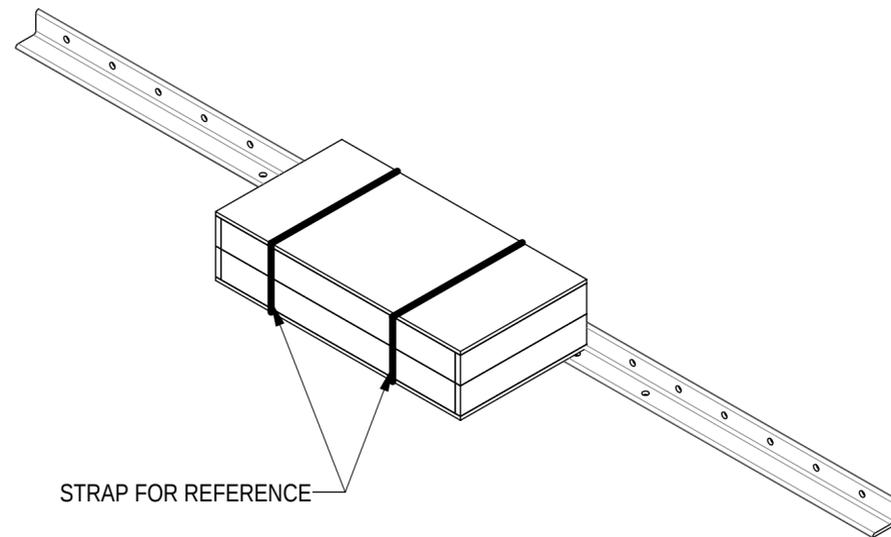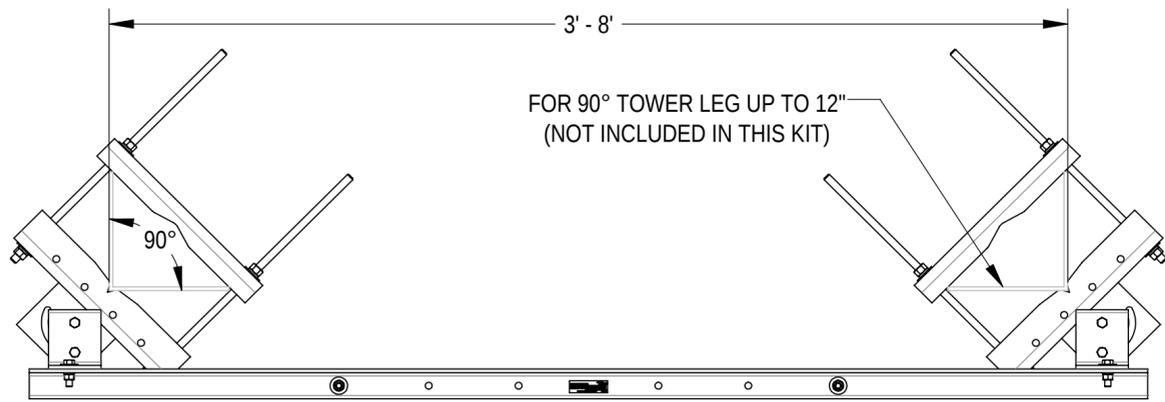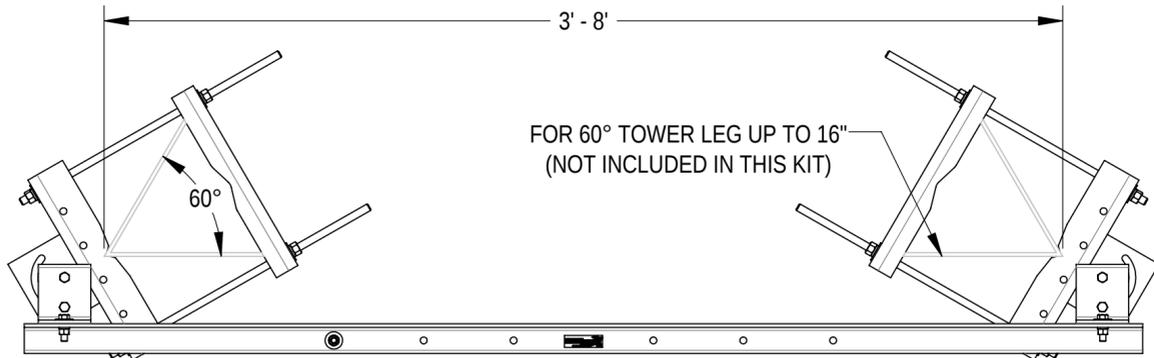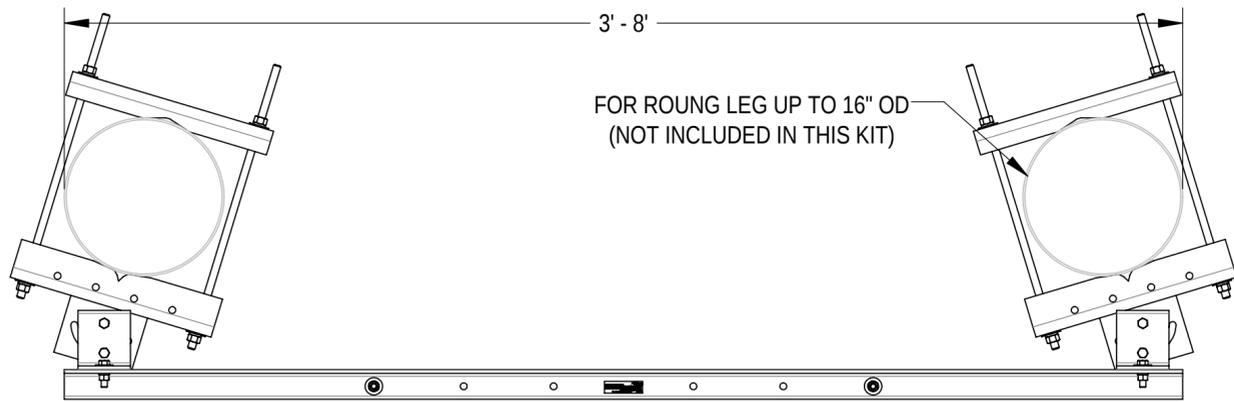

PACKAGE

DENSITY		lbs/in ³
MASS	193.31	lbs
VOLUME	1402.68	in ³
SURFACE AREA	11644.39	in ²
HEIGHT	11.4"	
LENGTH	123.6"	
WIDTH	40.3"	

Confidential

ANDREW® an Amphenol company

TOLERANCES: 1 PLACE .X[X] ± 0.2[6.3], 2 PLACE .XX[X] ± 0.12[3.0], 3 PLACE .XXX[X] ± 0.060[1.5], ANGLES ± 2°

SAP MATERIAL MASTER: 860689555-U-L

FINISH: MATERIAL








UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994

NAME	DATE	TITLE
CE NSUN	08DEC25	LARGE ANCHOR, GUYED-SS-TOEWR, UNIVERSAL
RW LL1090	02/05/2026	
AD RM1270	02/05/2026	
RE YMENG	02/05/2026	
ECN 50106581AMO		

SCALE: 1:16 DOCUMENT NO.: 860689555-U-L

SIZE	Auth Group	INSL	MODEL	DRAWING			SHEET		
C			VERSION	STATUS	REVISION	VERSION	STATUS	REVISION	1 OF 2
			00	RE	A	00	RE	A	

NOTE: -ANY ARRANGEMENTS OF THE EYEBOLTS IS ACCEPTABLE
 -MAXIMUM NET CABLE WEIGHT
 A -PER EYEBOLT = 750 LBS
 B -IN ANY COMBINATION = 1500 LBS
 -NOT TO BE USED FOR HOISTING
 -COMPETENT PERSON TO MAKE DETERMINATION OF USAGE ON THE STRUCTURE

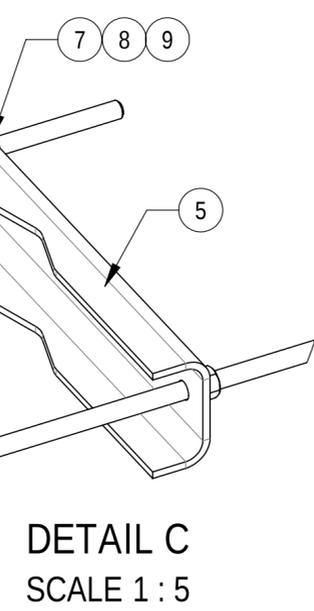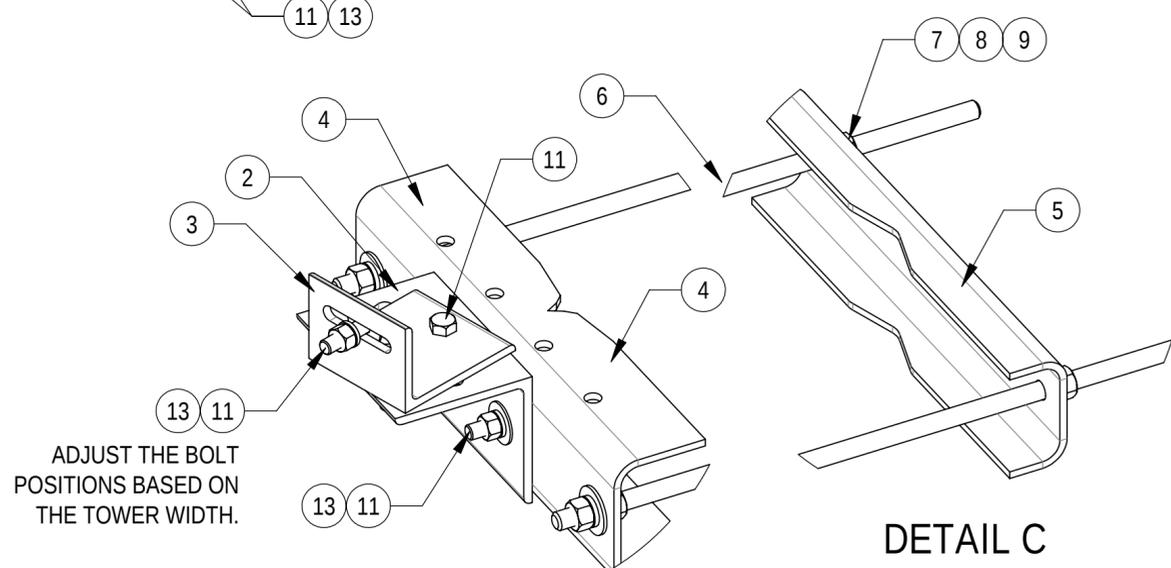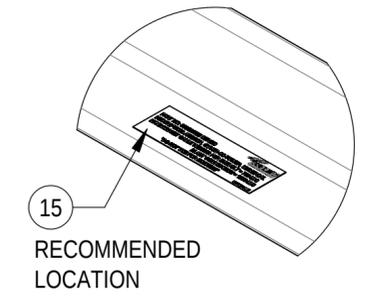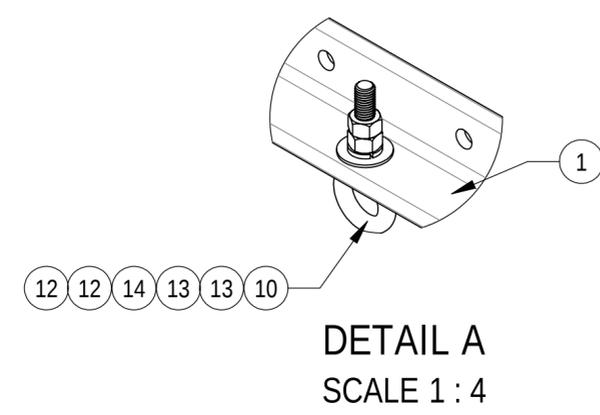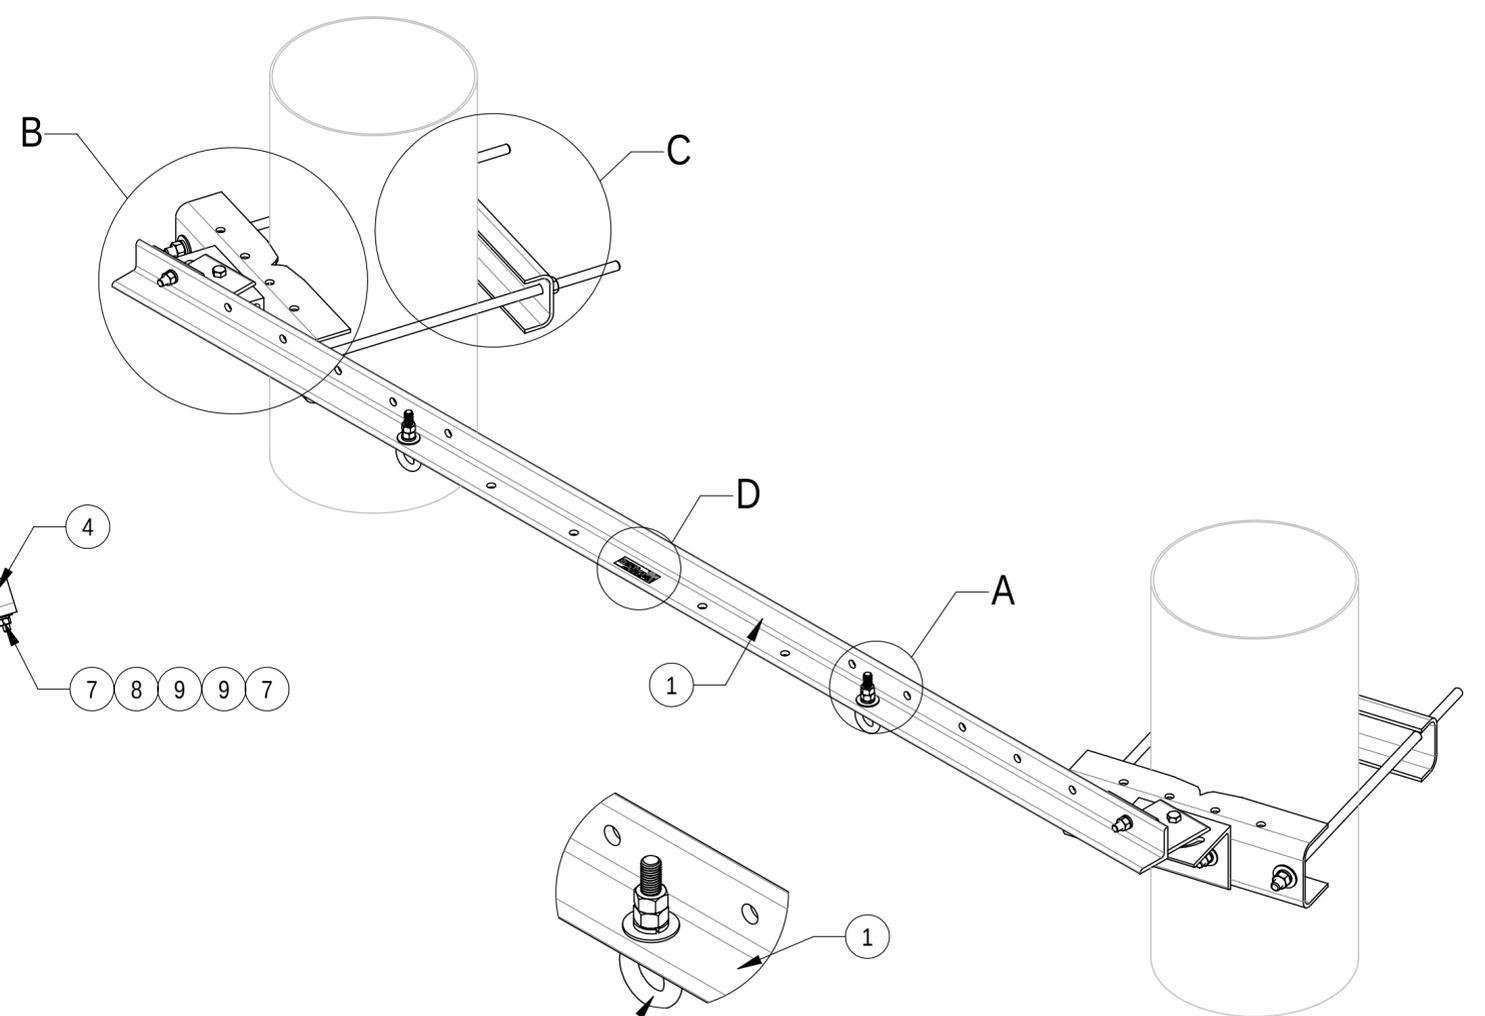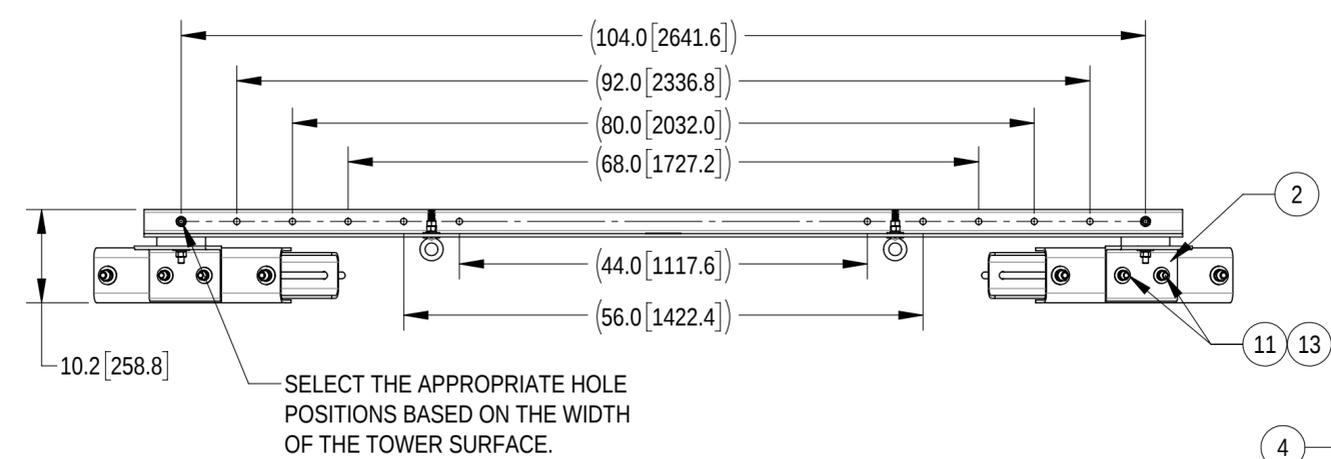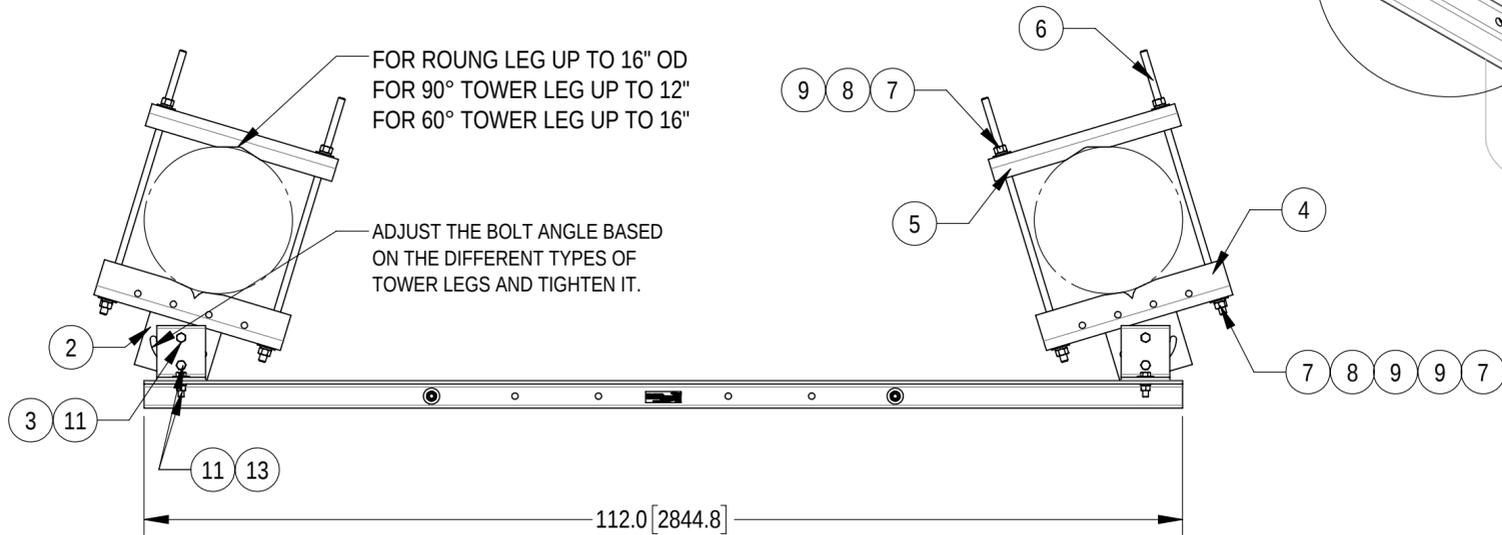

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
 INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	MTC4217-00	CROSSMEMBER GALVANIZED	1	65.63 LBS	
2	MTC4217-1000-00	ANGLE ADJUSTMENT BRACKET	2	9.16 LBS	
3	MTC4217-2000-00	FACE BRACKET	2	5.01 LBS	
4	SMU201601	LARGE SADDLE MOUNT, 16" TOWER LEG	2	22.42 LBS	
5	SMU201602	CLAMP PLATE	2	15.48 LBS	
6	MT38430B7	3/4" X 30" GALV THREADED ROD, GRADE B7	4	3.73 LBS	
7	GN-06	3/4" GALV HEX NUT	12	0.15 LBS	
8	GWL-06	3/4" GALV LOCK WASHER	8	0.04 LBS	
9	GWF-06	3/4" GALV FLAT WASHER	12	0.10 LBS	
10	9674-1	BOLT,EYE,5/8X3,STL,GALV	2	0.08 LBS	
11	GB-0522A	5/8" X 2-1/4" GALV BOLT KIT (A325)	10	0.28 LBS	
12	GN-05	5/8" GALV HEX NUT	4	0.08 LBS	
13	GWF-05	5/8" GALV FLAT WASHER, 1.7OD	16	0.06 LBS	
14	GWL-05	5/8" GALV LOCK WASHER	2	0.03 LBS	
15	MTC4217-LAB01	LABEL, ANCHOR, GUYED-SS-TOWER,UNIVERSAL	1	0.00 LBS	

ANDREW an Amphenol company

TITLE
LARGE ANCHOR,GUYED-SS-TOEWR,UNIVERSAL

SIZE C	SCALE 1:16	DOCUMENT NO. 860689555-U-L
DRAWING		SHEET
VERSION 00	STATUS RE	REVISION A
		2 OF 2

Confidential