

NN-65A-HG-R1B-V1



4-port Next Generation PerforMax™ Superior Coverage and Capacity sector antenna, 4x 698–896 MHz, 65° HPBW, 4 ft, 1x RET



- Ideal 4T4R low band antenna for use with an FD mMIMO antenna
- Antenna optimized for higher gain with superior radiation efficiency
- Powered by Andrew's SEED® technology (Sustainable Energy Efficient Design)
- Superior patterns for enhanced interference mitigation resulting in improved SINR, higher throughput, and more capacity
- Best in class PIM immunity
- Internal SBTs allow remote RET control from the radio over the RF jumper cable

General Specifications

Antenna Type	Sector with internal RET and bias tee
Band	Single band
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, low band	4
RF Connector Quantity, total	4


Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal Bias Tee	Port 1
Internal RET	Low band (1)
Power Consumption, active state, maximum	10 W

NN-65A-HG-R1B-V1

Power Consumption, idle state, maximum	2 W
Protocol	3GPP/AISG 2.0
Dimensions	
Width	640 mm 25.197 in
Depth	235 mm 9.252 in
Length	1224 mm 48.189 in
Net Weight, without mounting kit	28 kg 61.729 lb

Array Layout

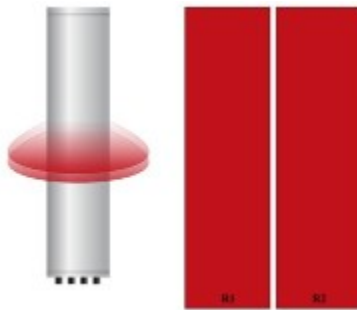

Array ID	Frequency (MHz)	RF Connector	RET (dB)	AISG No.	SBT RF Port	SBT No.	RET UID
R1	698-896	1-2	1	AISG1	1	1	CPxxxxxxxxxxxxxxxxR1
R2	698-896	3-4	1				

(Colors of colored boxes are not true depictions of array sizes)

Port Configuration



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	600 W @ 50 °C

NN-65A-HG-R1B-V1

Electrical Specifications

	R1,R2	R1,R2
Frequency Band, MHz	698–806	806–896
RF Port	1-4	1-4
Gain, Maximum, dBi	14.4	14.6
Gain, dBi	14.1	14.3
Beamwidth, Horizontal, degrees	65	62
Beamwidth, Vertical, degrees	18.5	16.6
Beam Tilt, degrees	2–16	2–16
USLS (First Lobe), dB	15	15
Front-to-Back Ratio, Copolarization 180° ± 30°, dB	26	28
CPR at Boresight, dB	25	23
Isolation, Cross Polarization, dB	25	25
Isolation, Inter-band, dB	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300

Mechanical Specifications

Wind Loading @ Velocity, frontal	473.0 N @ 150 km/h (106.3 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	128.0 N @ 150 km/h (28.8 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	603.0 N @ 150 km/h (135.6 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	295.0 N @ 150 km/h (66.3 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	752 mm 29.606 in
Depth, packed	377 mm 14.843 in
Length, packed	1379 mm 54.291 in
Weight, gross	41 kg 90.389 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
UK-ROHS	Compliant

NN-65A-HG-R1B-V1

Included Products

- BSAMNT-3 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance