


INSTALLATION INSTRUCTION FOR CMAX-OMF8-43-UWI53

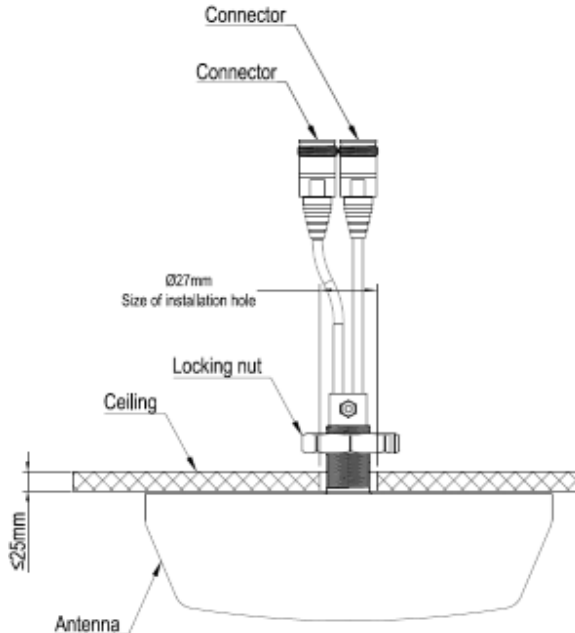

Notes:

- Observe that the bending radius of the cables must not be less than 40 mm.
- For optimal operation, this antenna should **NOT** be mounted to a **metallic ceiling/surface**. If there is no other option, contact our Technical Support.

Installation Steps

- 1) Cut a hole in the ceiling tile with the diameter shown above.
- 2) Remove the locking nut from the back of the antenna
- 3) Feed the pigtail of the antenna through the hole in the ceiling tile.
- 4) Reinstall the locking nut so that it is snug against the ceiling tile.

Version	Changes	Release Date
M0149AXB		27-February-2024
M0149AXC	- Rebranding and contact data updated; editorial update	22-April-2026

Online Support

Scan the QR code to submit tickets:



Copyright © 2026 ANDREW®, an Amphenol company. All Rights Reserved.

Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.

Andrew Wireless Systems GmbH, 22-April-2026