


# DFT-24M2-LC-MP



HELIAX® Direct trunk, 24 OM4 Bend-Insensitive multimode fiber. End 1: MPO, End 2: DLC

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Product Type	Wireless Fiber Cable Assemblies
Product Brand	HELIAX®
Product Series	DFT
Ordering Note	ANDREW® non-standard product

## General Specifications


Construction Type	Discrete fiber trunk
Interface, Connector A	DLC
Interface Feature, connector A	Uniboot
Interface Body Style, connector A	Straight
Interface, Connector B	MPO Female
Interface Feature, connector B	Uniboot
Interface Body Style, connector B	Straight
Jacket Color	Black
Total Fibers, quantity	24

## Dimensions

Cable Assembly Length Range (ft)	10 – 1000
Diameter Over Jacket	8.3 mm   0.327 in

## Ordering Tree

# DFT-24M2-LC-MP

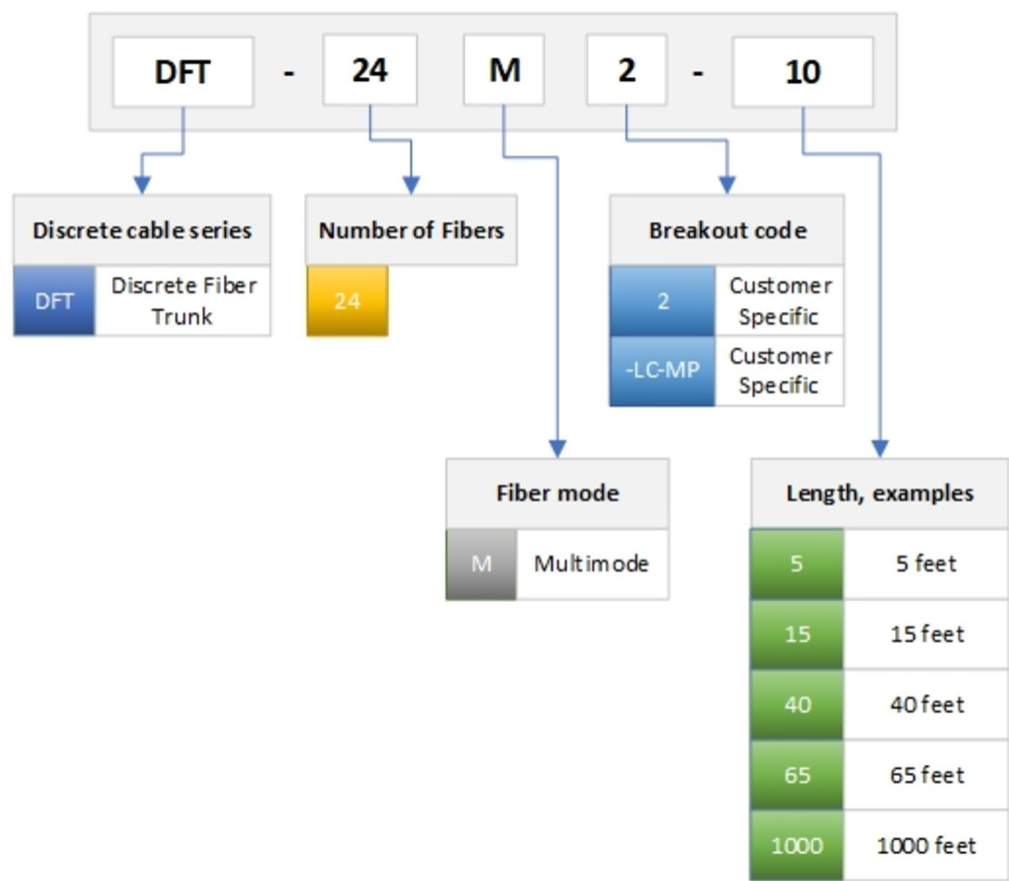

## Mechanical Specifications

**Minimum Bend Radius, furcation** 30 mm | 1.181 in

## Optical Specifications

**Fiber Mode** Multimode

**Fiber Type** OM4, LazrSPEED® 550

**Insertion Loss, typical note** Insertion loss is measured at 850 and 1300 nm

**Insertion Loss, typical** 0.75

## Environmental Specifications

**Operating Temperature** -40 °C to +70 °C (-40 °F to +158 °F)

**Environmental Space** Outdoor

## Packaging and Weights

# DFT-24M2-LC-MP

---

**Cable weight** 72 kg/km | 48.382 lb/kft

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

**Insertion Loss, typical note** Insertion loss is measured at a room temp of +20°C (+68°F)