ANDREW®
an Amphenol company



CABINET PRODUCT SELECTION GUIDE

ANDREW® CABINETS AND POWER, ACPP

CMC8S, MICRO CABINET

Rack space

- Up to 8 RU in 19" EIA horizontal rack space

Battery support

- Up to 1 string of 170Ah batteries
- Supports VRLA and lithium batteries

Cooling Options

- Up to 2x 300 W HVAC and 600 W heater
- 800 W direct air cooling
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available

Dimensions

Overall: 24" W x 22" D x 22" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C





Click to see the field replacement units and aftermarket kit

S8BX-XX-AXXDXX-XXX

Number of battery
0 = 0 strings of batteries
1 = 1 string of batteries

Cooling option
D1 = 2x 300W HVAC w/ 600 W heater
D8 = 300 W HVAC w/ 300 W heater
F1 = 800 W direct air cooling (MERV 15)
P1 = Passive venting

Battery compartment setup
8S#= 8RU standard battery compartment

CMC14S, MICRO CABINET

Rack space

- Up to 14 RU in 19" EIA horizontal rack space

Battery support

- Up to 2 strings of 190Ah batteries
- Supports VRLA and lithium batteries

Cooling options

- Up to 2x 300 W HVAC and 600 W heater
- 1000 W thermosiphon
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available

Dimensions

Overall: 24" W x 22" D x 32" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit





S14BX-XX-AXXDXX-XXX

Number of battery
0 = 0 string of batteries
1 = 1 string of batteries
2 = 2 strings of batteries

Cooling option
D8 = 300 W HVAC w/ 300 W heater
T3 = 1000 W thermosiphon
P1 = Passive venting
D1 = 2x 300 W HVAC w/ 600 W heater
D9 = 500 W HVAC w/ 500 W heater

Battery compartment setup
7S# = 7RU standard battery compartment
8S#= 8RU standard battery compartment

CMC8L, MICRO CABINET

Rack space

- Up to 8 RU in 19"/23" EIA horizontal rack space

Battery support

- Up to 1 string of 190Ah batteries
- Supports VRLA and lithium batteries

Cooling options

- Up to 2x 300 W HVAC and 600 W heater
- 1600 W direct air cooling
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available

Dimensions

Overall: 28" W x 28" D x 22" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C





Click to see the field replacement units and aftermarket kit

L8BX-XX-AXXDXX-XXX

Number of battery
0 = 0 string of batteries
1 = 1 string of batteries

Cooling option
D1 = 600 W HVAC w/ 600 W heater (2X)
D8 = 300 W HVAC w/ 300 W heater
F8 = 1600 W Direct air cooling (MERV 15)
P1 = Passive venting

Battery compartment setup
7S# = 7RU standard battery compartment
8S#= 8RU standard battery compartment

CMC21, MICRO CABINET

Rack space

- Up to 21 RU in 19"/23" EIA horizontal rack space

Battery support

- Up to 3 strings of 170Ah batteries
- Supports VRLA and lithium batteries

Cooling options

- 2000 W HVAC
- 1500 W thermosiphon
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available

Dimensions

Overall: 28" W x 28" D x 45" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit





21BX-XX-AXXDXX-XXX

Number of battery
0 = 0 strings of batteries
1 = 1 string of batteries
3 = 3 strings of batteries

Cooling option
D3 = 2000 W HVAC
T1 = 1500 W thermosiphon
P1 = Passive venting

Battery compartment setup
7S# = 7RU standard battery compartment
8S#= 8RU standard battery compartment

CMC28, MICRO CABINET

Rack space

- Up to 28 RU in 19"/23" EIA horizontal rack space

Battery support

- Up to 4 strings of 170Ah batteries
- Supports VRLA and lithium batteries

Cooling Options

- 2000 W HVAC
- 3000 W HVAC
- 1500 W thermosiphon
- 3800 W thermosiphon
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available

Dimensions

Overall: 28" W x 28" D x 57" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit





28BX-XX-AXXDXX-XXX

Number of battery
0 = 0 string of batteries
1 = 1 string of batteries
2 = 2 strings of batteries
4 = 4 strings of batteries

Cooling option
D3 = 2000 W HVAC
D5 = 3000 W HVAC
T1 = 1500 W thermosiphon
T2 = 3800 W thermosiphon
P1 = Passive venting

Battery compartment setup
7S# = 7RU standard battery compartment
8S#= 8RU standard battery compartment

CMC35, MICRO CABINET



Rack space

- Up to 35 RU in 19"/23" EIA horizontal rack space

Battery support

- Up to 5 strings of 170Ah Batteries
- Supports VRLA and lithium batteries

Cooling options

- 2000 W HVAC
- 3000 W HVAC
- 1500 W thermosiphon
- 3800 W thermosiphon
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available



Dimensions

Overall: 28" W x 28" D x 69" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

35BX-XX-AXXDXX-XXX

Number of battery
0 = 0 string of batteries
1 = 1 string of batteries
2 = 2 strings of batteries
3 = 3 strings of batteries
4 = 4 strings of batteries
5 = 5 strings of batteries

Cooling option
D3 = 2000 W HVAC
D5 = 3000 W HVAC
T1 = 1500 W thermosiphon
T2 = 3800 W thermosiphon
P1 = Passive venting

Battery compartment setup
7S# = 7RU standard battery compartment
8S#= 8RU standard battery compartment

CMC40, MICRO CABINET



Rack space

- Total of 24 RU in 19" EIA horizontal rack space

Battery support

- Up to 2 strings of 170Ah batteries
- Supports VRLA, NiCad and lithium batteries

Cooling Options

- 3000 W HVAC
- 3800 W thermosiphon
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available



Dimensions

Overall: 24" W x 32" D x 74" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

S40BXX-XX-AXXDXX-XXX

Number of battery
2 = 2 strings of batteries

Battery configuration
V = VRLA battery type
N = NiCad battery type
L = Lithium battery type

Cooling option
D5 = 3000 W HVAC
T2 = 3800 W thermosiphon
P1 = Passive venting

Battery compartment setup
7S# = 7RU standard battery compartment

CMC24, MICRO CABINET

Rack space

- Up to 24 RU in 19"/23" EIA horizontal rack space

Battery support

- 1 string of 190Ah batteries

Cooling options

- 2000 W HVAC
- 3000 W HVAC
- 1500 W thermosiphon
- 3800 W thermosiphon
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- External ground locations available

Dimensions

Overall: 32" W x 42" D x 48" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit





24BX-XX-AXXDXX-XXX

Number of battery
0 = 0 strings of batteries
1 = 1 string of batteries

Cooling option
D3 = 2000 W HVAC
D5 = 3000 W HVAC
T1 = 1500 W thermosiphon
T2 = 3800 W thermosiphon
P1 = Passive venting

Battery compartment setup
8S#= 8RU standard battery compartment

CMC72-32B, BATTERY CABINET



Battery support

- 5 battery shelves that can house up to 5 strings of 200Ah batteries
- Supports VRLA and NiCad batteries
- 5x 300A circuit breakers

Cooling options

- Passive venting with 1000 W heater

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, left and right
- Door intrusion alarms
- Roof top solar shield
- External ground locations available



Dimensions

Overall: 32" W x 36" D x 72" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

72BX-XX-AXXDXX-XXX

Number of battery
5 = 5 strings of batteries

Cooling option
P1 = Passive venting with 1000 W heater

Battery compartment setup
8H#= 13.25" battery compartment/ high power batteries

CMC72-32C, POWER CABINET



Rack space

- Up to 15 RU in 19"/23" EIA horizontal rack space

Battery support

- 3 battery shelves that can house up to 3-strings of 200Ah batteries
- Supports VRLA and NiCad batteries
- 3x 300A circuit breakers

Cooling options

- 4000 W heat exchanger (HEX)
- 1000 W heater

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- Integrated puck lock
- External ground locations available



Dimensions

Overall: 32" W x 36" D x 72" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

72BX-XX-AXXDXX-XXX

Number of battery
3 = 3 strings of batteries

Cooling option
T7 = 4000 W HEX

Battery compartment setup
8H#= 13.25" battery compartment/ high power batteries

CMC74-36E, EQUIPMENT CABINET



Rack space

- Adjustable to 19" or 23" EIA
  - At 19", 40RU horizontally + 9RU vertically
  - At 23", 40RU horizontally + at 19" 3RU vertically

Battery support

- Rack mounted lithium batteries compatible

Cooling options

- 5000 W w/ EVS HVAC w/ 500 W Heater
- 4000 W w/ EVS HVAC w/ 500 W heater
- 4200 W thermosiphon
- 3000 W HVAC
- 3000 W thermosiphon

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- Integrated puck lock
- External ground locations available



Dimensions

Overall: 36" W x 37" D x 74" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

74BXX-XX-AXXDXX-XXX

Number of battery
0 = 0 strings of batteries

= Total number of rack-mountable lithium batteries

Battery type
L = lithium battery type

Cooling option
D17 = 4000 W w/ EVS HVAC w/ 500 W heater (R513a)
D23 = 5000 W w/ EVS HVAC w/ 500 W heater (R513a)
D20 = 3000 W (R513a) HVAC
T5 = 4200 W thermosiphon
T6 = 3000 W thermosiphon

Battery compartment setup
01 - 99 = cabinet variation

CMC74-36B, BATTERY CABINET





Battery support

- 4 battery shelves that can house up to 6 split strings of 200Ah batteries
- Supports VRLA and NiCad batteries
- 6x 250A Circuit Breakers

Cooling options

- 1000 W DC HVAC with 500 W heater
- 1000 W heater
- Passive venting

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Roof top and side solar shield
- Integrated puck lock
- External ground locations available

Dimensions

Overall: 36" W 37" D X 74" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

74BXX-XX-AXXDXX-XXX

Number of battery
6 = 6 split strings of batteries

Battery type
V = VRLA battery type
N = NiCad battery type

Cooling option
D16 = 1000 W HVAC w/ 500W heater (R513a)
D19 = 1000W heater
P1 = Passive venting

Battery compartment setup
7S# = 7RU standard battery compartment

CMC74-36C, COMBO CABINET



Rack space

- Adjustable to 19" or 23" EIA
  - At 19", 20RU horizontally + 4RU vertically
  - At 23", 20RU horizontally + at 19" 4RU vertically

Battery support

- 2 battery shelves that can house up to 3 split strings of 48V batteries
- Supports VRLA and NiCad batteries

Cooling options

- 3000 W HVAC
- 3000 W thermosiphon

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- Integrated puck lock
- External ground locations available



Dimensions

Overall: 36" W 37" D X 74" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

74BXX-XX-AXXDXX-XXX

Number of battery
3 = 3 split strings of batteries

Battery type
V = VRLA battery type
N = NiCad battery type

Cooling option
D20 = 3000 W HVAC (R513a)
T6 = 3000 W thermosiphon

Battery compartment setup
7S# = 7RU
standard battery compartment

CMC85-36C, COMBO CABINET



Rack space

- Adjustable to 19" or 23" EIA
  - At 19", 27RU horizontally + 8RU vertically
  - At 23", 27RU horizontally + At 19" 8RU vertically

Battery support

- 2 battery shelves that can house up to 3 split strings of 48V batteries
- Supports VRLA and NiCad batteries

Cooling options

- 4000 W w/ EVS HVAC w/ 500 W heater
- 4200 W thermosiphon
- 3000 W HVAC
- 3000 W thermosiphon

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- Integrated puck lock
- External ground locations available



Dimensions

Overall: 36" W x 37" D x 85" H, dimensions may vary
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

85BXX-XX-AXXDXX-XXX

Number of battery
3 = 3 split strings of batteries

Battery type
V = VRLA battery type
N = NiCad battery type

Cooling option
D17 = 4000 W w/ EVS HVAC w/ 500 W heater (R513a)
D23 = 5000 W w/ EVS HVAC w/ 500 W heater (R513a)
D20 = 3000 W (R513a) HVAC
T5 = 4200 W thermosiphon
T6 = 3000 W thermosiphon

Battery compartment setup
7S# = 7RU standard battery compartment

CMW48, MULTI-BAY CABINET

Rack space

- Up to 64 RU in 19"/23" EIA horizontal rack space

Battery support

- Up to 2 strings of 190Ah Batteries
- Supports VRLA and lithium batteries

Cooling Options

- 2000 W HVAC
- 3000 W HVAC
- 1500 W thermosiphon
- 3800 W thermosiphon



Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- External ground locations available



Dimensions

Overall: 62" W x 42" D x 48" H
Depth may vary based on cooling systems
See datasheet for product weight

Note: Cabinet Weights are without Plinth (112.4 lbs. [51 kg])

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

48BX-XX-AXXDXX-XXX

Number of battery
0 = 0 strings of batteries
1 = 1 string of batteries
2 = 2 strings of batteries

Cooling option
D3 = 2000 W HVAC
D5 = 3000 W HVAC
T1 = 1500 W thermosiphon
T2 = 3800 W thermosiphon

Battery compartment setup
8S#= 8RU standard battery compartment

CMW78, MULTI-BAY CABINET

Rack space

- in 19"/23" EIA horizontal rack space
- 2x 38 RU of equipment and 16 RU in power bay rack space available



Battery support


- Up to 3 strings of batteries
- 200A circuit breaker
- Supports VRLA and lithium batteries

Cooling options

- 4000 W thermosiphon
- 6000 W thermosiphon

Additional features

- LED light
- GFCI outlet
- Hinged doors
- Knockouts on rear, bottom, left and right
- Door intrusion alarms
- Flexible rack conversion between 19"/23" EIA
- Roof top solar shield
- External ground locations available

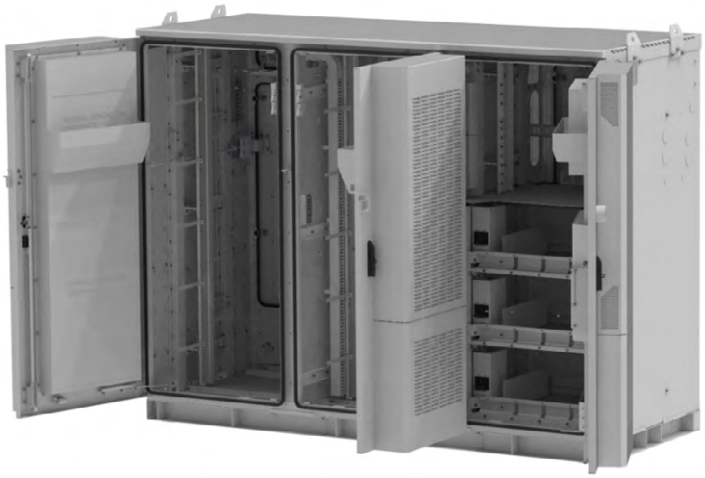

Dimensions

Overall: 92" W x 42" D x 78" H
Depth may vary based on cooling systems
See datasheet for product weight

Designed to meet GR-487

*Hardened equipment to -40º C to +65º C

Click to see the field replacement units and aftermarket kit

78WX-XX-AXXDXX-XXX

Number of battery
3 = 3 strings of batteries

Cooling option
T8 = 2x 6000 W,
1x 4000 W thermosiphon

Battery compartment setup
8H#= 13.25" battery compartment/ standard battery tray

ACPP INTEGRATED OUTDOOR ENCLOSURE



POWER PLANT

ANDREW is powerplant agnostic



UPCONVERTER

ANDREW is power agnostic




SITE CONTROLLER

ANDREW Site Controller



BATTERY

ANDREW cabinets are lithium, VRLA, and NiCad battery compatible.

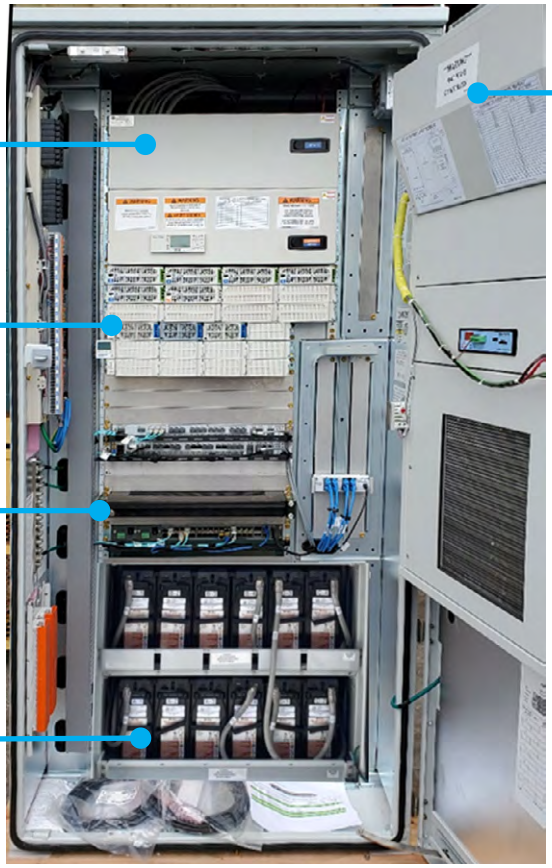



COOLING

ANDREW has cooling options like direct air cooling, heat exchangers, thermosiphons, and HVACs



OTHER EQUIPMENT

ANDREW cabinets can be integrated with power distribution units, breaker panels, fiber patch panels (24F-576F) from any preferred vendor

OVP

ANDREW can provide surge protection inside or outside the cabinet.



LOAD CENTER

ANDREW can integrate AC load centers, ILCs, meter cans, generator inlets, etc.

CABINET + INTEGRATION

ANDREW works closely with customers to determine ideal level of integration and select the ideal products to improve costs, logistics, and site turn up time.

PARTNER DESIGN

IN-HOUSE DESIGN

CABINET ACCESSORIES

CABINET MOUNTING OPTIONS

PLINTHS (CABINET RISER)

- 3" and 6" plinths available for CMC8L, CMC21, CMC28, and CMC35
- Stackable 6" and 12" plinths available for CMC8L, CMC21, CMC28, and CMC35

***Available Macro cabinet plinths are included in AMK appendix**



Plinth

PAD MOUNT FRAME (PMF)


- Pour in place cabinet mount. Assists with efficent cabinet install
- Avaliable for CMC8L, CMC21, CMC28, CMC35, CMC24, and CMW48



Pad Mount Frame

POLE MOUNT AND H-FRAME

- Available only for the CMC8S, CMC14, CMC8L, CMC21, and CMC28

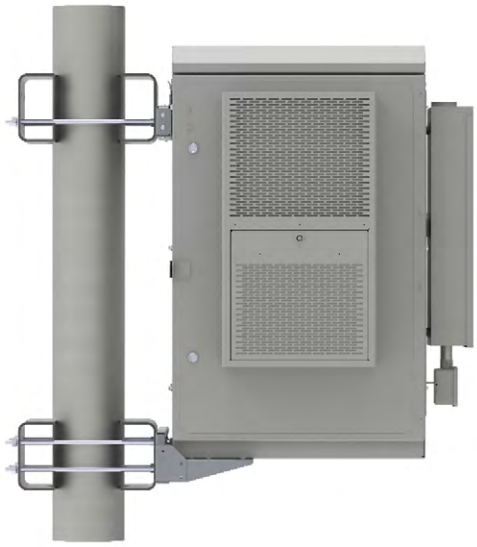


Pole Mount




Wall/H-Frame Mounting

AC UTILITY INPUT SOLUTION


- 125A or 200A AC load center options
- AC panels available with 8, 12, 16 or 20 positions
- Optional surge protection device (SPD), meter base, or various generator inlet options available
- Mounts on the left or right side of CMC14, CMC21, CMC28, and CMC35

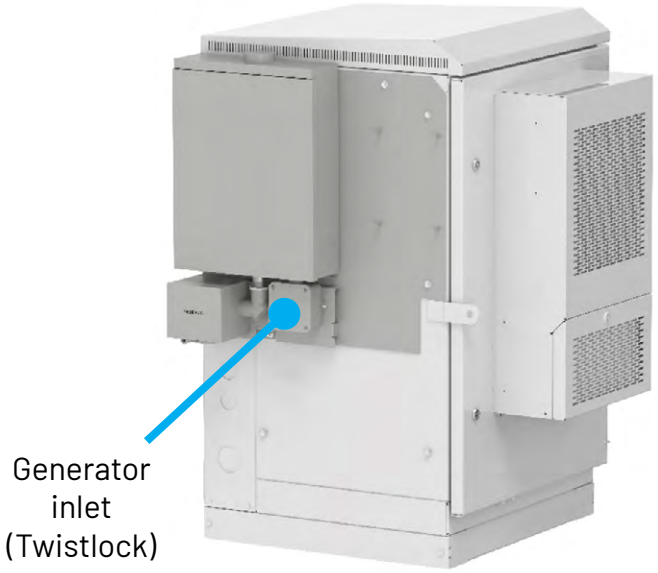

Example: CMC21 with 12 POS, 125A AC load center

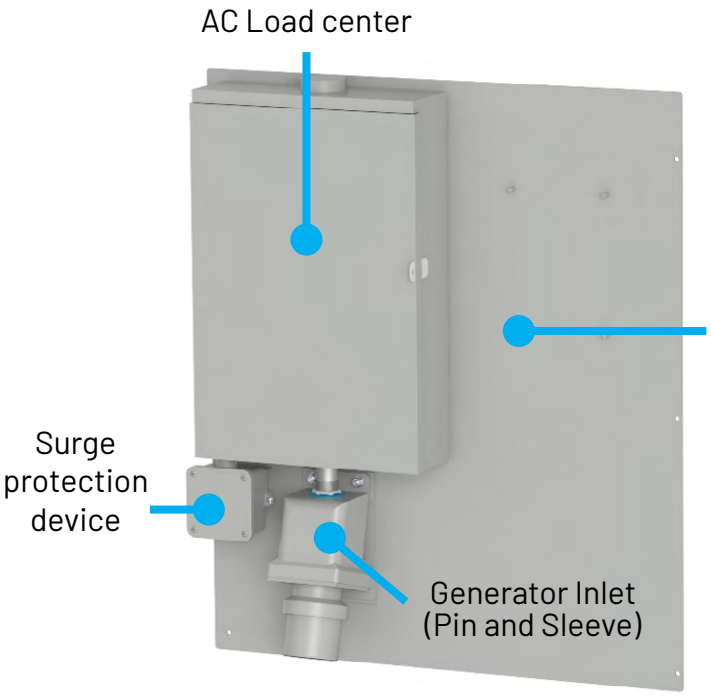

Example: 16POS 124A AC Load Center

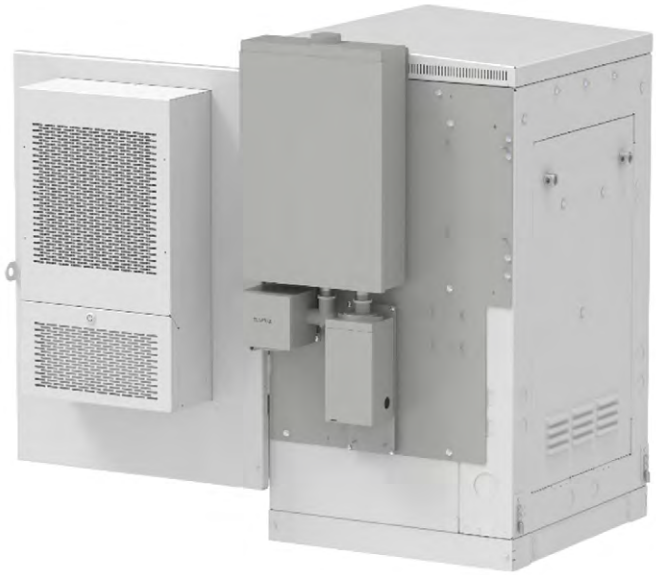

Example: Canadian Standards Association (CSA) approved option 16 POS, 100A AC load center

AFTER MARKET KITS

CMC8S, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242239	FRU, solar shield, CMC 8-21S
760242246	AMK, wall/H-frame mount, CMC 24W22D
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, Qtr-Turn Pnl
760259041	LED Light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

CMC8L, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242239	FRU, solar shield, CMC 8-21S
760242247	AMK, wall/H-frame mount, CMC 28W28D
760242250	AMK, pole mount kit, CMC 28W28D
760250922	Front door swing handle only (460200318)
760256682	AMK, pad mount frame, CMC 28W28D
760256811	Spare part, key, qtr-turn pnl
760256822	AMK, 3" plinth CMC 28W28D used w/ PMF
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

CMC14S, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242200	FRU, front door, CMC-14, thermosiphon
760242239	FRU, solar shield, CMC 8-21S
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760242246	AMK, WALL/H-frame mount, CMC 24W22D
760243130	CMC14 equipment back panel assembly
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, qtr-turn pnl
760256889	AMK, pole mount kit, CMC14
760259041	LED Light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door Stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

AFTER MARKET KITS

CMC21, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242201	FRU- CMC-21 thermosiphon door
760242232	FRU, equipment rear panel, CMC-21
760242240	FRU, solar shield, CMC21-35
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760242247	AMK, wall/H-frame mount, CMC 28W28D
760242250	AMK, pole mount kit, CMC 28W28D
760250922	Front door swing handle only (460200318)
760256682	AMK, pad mount frame, CMC 28W28D
760256811	Spare part, key, qtr-turn pnl
760256822	AMK, 3" plinth CMC 28W28D used w/ PMF
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760259943	FRU, 2000W air conditioner, 48VDC
760260771	AMK, 6" plinth stackable w/ 3" plinth
760260772	AMK, 12" plinth stackable w/ 3" plinth
760260961	CMC21 wooden pole mounting kit
760261067	AMK, 6" plinth CMC 28W28D used w/ PMF
760262027	Door stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

CMC28, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242233	FRU, equipment rear panel, CMC-28
760242240	FRU, solar shield, CMC21-35
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760242247	AMK, wall/H-frame mount, CMC 28W28D
760242250	AMK, pole mount kit, CMC 28W28D
760250922	Front door swing handle only (460200318)
760256682	AMK, pad mount frame, CMC 28W28D
760256811	Spare part, key, qtr-turn pnl
760256822	AMK, 3" plinth CMC 28W28D used w/ PMF
760257801	FRU, 380w/ K thermosiphon
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760259943	FRU, 2000W air conditioner, 48VDC
760260771	AMK, 6" plinth stackable w/ 3" plinth
760260772	AMK, 12" plinth stackable w/ 3" plinth
760261067	AMK, 6" plinth CMC 28W28D used w/ PMF
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262544	FRU, 3000W air conditioner, 48VDC
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

AFTER MARKET KITS

CMC35, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242234	FRU, equipment rear panel, CMC-35
760242240	FRU, solar shield, CMC21-35
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760242247	AMK, wall/H-frame mount, CMC 28W28D
760242250	AMK, pole mount kit, CMC 28W28D
760250922	Front door swing handle only (460200318)
760256682	AMK, pad mount frame, CMC 28W28D
760256811	Spare part, key, qtr-turn pnl
760256822	AMK, 3" plinth CMC 28W28D used w/ PMF
760257801	FRU, 380 w/K thermosiphon
760259041	LED Light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760259943	FRU, 2000W air conditioner, 48VDC
760260771	AMK, 6" plinth stackable w/3" plinth
760260772	AMK, 12" plinth stackable w/3" plinth
760261067	AMK, 6" plinth CMC 28W28D used w/ PMF
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262544	FRU, 3000W air conditioner, 48VDC
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

CMC40, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, qtr-turn pnl
760257801	FRU, 380w/ K thermosiphon
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

CMC24, MICRO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242240	FRU, solar shield, CMC21-35
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, qtr-turn pnl
760257801	FRU, 380w/ K thermosiphon
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door Stay, small CMC, CMC74/72/85, CMW
760262616	AMK, pad mount frame, CMC24 (3MV01278AA)
760263865	Battery string alarm loopback (x1)
760264339	FRU, solar shield, CMC24
760264340	FRU, front door, CMC24
760264341	FRU, rear door, CMC24

Back to cabinet specifications

AFTER MARKET KITS

CMC72-32B, BATTERY CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760259041	LED light
760263865	Battery string alarm loopback (x1)
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760258803	1000 W wall mounted heater
760259039	300A battery breaker, 2 pole
760023713	FRU, door switch (407667658)
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, qtr-turn pnl
760258766	3" plinth, CMC72-32
760258767	6" plinth, CMC72-32
760258810	Swing handle and door rods, front door, cmc72-32b
760258828	8" interconnect, 3 pair 4/0, 2", CMC72
760258829	Front door, passive, CMC72-32B
760259042	Rear door, CMC72-32B
760259526	Solar shield, CMC72
760262027	Door stay, small CMC, CMC74/72/85, CMW

Back to cabinet specifications

CMC72-32C, POWER CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, qtr-turn pnl
760258766	3" plinth, CMC72-32
760258767	6" plinth, CMC72-32
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760258803	1000W wall mounted heater
760258804	Front door, 4 kW HEX included, CMC72-32C
760258806	Control board, 4 kW HEX, CMC72-32C
760258807	Inner or outer loop fan, 4KW HEX, fan cable included, CMC72-32C
760258809	Swing handle and door rods, front door, CMC72-32C
760258811	Rear door, CMC72-32C
760258812	Rear panel, CMC72-32C
760258828	8" interconnect, 3 pair 4/0, 2", CMC72
760258919	Interlock replacement kit, CMC72-32C
760259039	300A battery breaker, 2 pole
760259041	LED light
760259057	Swing handle and door rods, rear door, CMC72-32C
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760259526	Solar shield, CMC72
760262027	Door stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

AFTER MARKET KITS

CMC74-36E, EQUIPMENT CABINET

Field Replacement Units and Aftermarket Kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760238305	Laptop tray/laptop drawer 19"
760239584-KIT	AMK, dial kit, propane Asentria 5000-067 - (site dependent)
760239585-KIT	AMK, dial kit, diesel- Asentria 5000-068 - (site dependent)
760239586-KIT	AMK, pressure switch, NGAS - Asentria 5006-049 - (site dependent)
760250922	Front door swing handle only (460200318)
760250927	Top solar shield, CMC74/85
760250933	6" plinth for CMC74/85 cabinets
760250960	Rear door, CMC74-36E
760251443	CMC74/85 fiber top hat
760253197	Sun Shield, CMC74/85
760253198	AMK, interchangeable Roxtec panel, 4-inch, Rear
760253929	Swing handle and door rods, front door, CMC74-36E
760256078	Rear panel, CMC74-36E, no hinges
760256496	Rear top knockout panel, CMC74-36E, CMC85-36C
760256497	Rear top blank panel, CMC74-36E, CMC85-36C
760256811	Spare part, key, qtr-turn pnl
760257909	CMC74-36EE, front door, 4 kW HVAC EVS
760258515	4 kW HVAC EVS, CMC74/85
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262064	18" interconnect, 3 Pair 4/0, 2", CMC74/85
760262204	5 kW HVAC EVS CMC74E/85
760262205	CMC74-36E, front door, 5 kW HVAC EVS
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

CMC74-36B, COMBO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760246443	12" interconnect, 3 pair 4/0, 2", CMC74/85
760250922	Front door swing handle only (460200318)
760250925	1 kW HVAC, 500W heater (860657614), CMC74B/85
760250927	Top solar shield, CMC74/85
760250928	FRU, circuit breaker, battery string, 250 A
760250933	6" plinth for CMC74/85 cabinets
760250958	CMC74-36B, front door, 1 kW HVAC w/ 500W heater
760250961	FRU, solar shield, side, CMC74-36B
760250984	CMC74-36B, front door, 1 kW heater
760251443	CMC74/85 fiber top hat
760253197	Sun shield, CMC74/85
760253587	Rear door, CMC74-36B
760253806	OmniOn thermal probe kit for main secondary compartment
760253996	Swing handle and door rods, front door, CMC74-36B
760256161	Rear panel, CMC74-36B, no hinges
760256811	Spare part, key, qtr-turn pnl
760258520	AMK, cable conv kit, VRLA to NiCad,CMC74B
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262064	18" interconnect, 3 pair 4/0, 2", CMC74/85
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

AFTER MARKET KITS

CMC74-36C, COMBO CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760246443	12" interconnect, 3 pair 4/0, 2", CMC74/85
760250922	Front door swing handle only (460200318)
760250927	Top solar shield, CMC74/85
760250928	FRU, circuit breaker, battery string, 250 A
760250933	6" plinth for CMC74/85 cabinets
760251443	CMC74/85 fiber top hat
760253197	Sun shield, CMC74/85
760253581	AMK, front panel kit, CMC74-36C
760253582	AMK, 3 kW air conditioner, DC
760256811	Spare part, key, qtr-turn pnl
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262064	18" interconnect, 3 pair 4/0, 2", CMC74/85
760262544	FRU, 3000W air conditioner, 48VDC
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

AFTER MARKET KITS

CMC85-36C, COMBO CABINET

Field replacement units and aftermarket kit

Back to cabinet specifications

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760238071	OmniOn thermal probe kit for main battery compartment
760238305	Laptop tray/laptop drawer 19"
760239584-KIT	AMK, dial kit, propane- Asentria 5000-067 - (site dependent)
760239585-KIT	AMK, dial kit, diesel- Asentria 5000-068 - (site dependent)
760239586-KIT	AMK, pressure switch, NGAS - Asentria 5006-049 - (site dependent)
760250922	Front door swing handle only (460200318)
760250924	Rear door, CMC85-36C
760250925	1 kW HVAC, 500W heater (860657614), CMC74B/85
760250927	Top solar shield, CMC74/85
760250928	FRU, circuit breaker, battery string, 250 A
760250933	6" plinth for CMC74/85 cabinets
760251443	CMC74/85 fiber top hat
760253197	Sun shield, CMC74/85
760253198	AMK, interchangeable Roxtec panel, 4-inch, rear
760253995	Swing handle and door rods, front door, CMC85-36C
760256225	Rear panel, CMC85-36C, no hinges
760256496	Rear top knockout panel, CMC74-36E, CMC85-36C
760256497	Rear top blank panel, CMC74-36E, CMC85-36C
760256811	Spare part, key, qtr-turn pnl
760258361	CMC85-36CE, front door, 4 kW HVAC EVS
760258362	CMC85-36CE, front door, 4 kW HVAC EVS, 1 kW HVAC
760258515	4 kW HVAC EVS, CMC74/85
760258518	AMK, cable conv kit,VRLA TO NiCad,CMC85C
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262064	18" interconnect, 3 pair 4/0, 2", CMC74/85
760262204	5 kW HVAC EVS CMC74E/85
760262206	CMC85-36CE, front door, 5 kW HVAC EVS
760262265	CMC85-36CE, front door, 5 kW HVAC EVS, 1 kW HVAC
760263865	Battery string alarm loopback (x1)

AFTER MARKET KITS

CMW48, MULTI-BAY CABINET

Field replacement units and aftermarket kit

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760242242	Inner loop fan, CMC HEX TS 431030006A
760242243	Outer loop fan, CMC HEX TS 431030006A
760250922	Front door swing handle Only (460200318)
760256811	Spare part, key, qtr-turn pnl
760257801	FRU, 380w/K thermosiphon
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel 23", 1RU
760260194	AMK, pad mount frame, CMW48 (3MV01124AA)
760262027	Door stay, small CMC, CMC74/72/85, CMW
760263865	Battery string alarm loopback (x1)

Back to cabinet specifications

AFTER MARKET KITS

CMW78, MULTI-BAY CABINET

Field replacement units and aftermarket kit

Back to cabinet specifications

PART NUMBER	DESCRIPTION
760023713	FRU, door switch (407667658)
760250922	Front door swing handle only (460200318)
760256811	Spare part, key, qtr-turn pnl
760258802	Stego thermostat, NC, 20-80C, 11100.0-02
760258803	1000W wall mounted heater
760259039	300A battery breaker, 2 pole
760259041	LED light
760259364	AMK, (5) blank panel, 19", 1RU
760259381	AMK, (5) blank panel, 23", 1RU
760262027	Door stay, small CMC, CMC74/72/85, CMW
760262166	FRU, door switch WUC front (460203105)
760262167	Interlock replacement kit, CMW78, WUC, right power bay
760262168	Solar shield, CMW78, WUC
760262169	GPS pipe, CMW78, WUC
760262170	Exterior motion LED light, CMW78, WUC
760262171	Swing handle and door rods, front door, right power bay, CMW78, WUC
760262172	Swing handle and door rods, front door, middle bay, CMW78, WUC
760262173	Swing handle and door rods, front door, left equipment bay, CMW78, WUC
760262174	Inner loop fan, 4 kW thermosiphon, CMW78, WUC
760262175	Inner loop fan, 6 kW thermosiphon, CMW78, WUC
760262176	Control board, 4 kW thermosiphon, CMW78, WUC
760262177	Control board, 6 kW thermosiphon, CMW78, WUC
760262178	Front door, 4 kW thermosiphon incl., right power bay, CMW78, WUC
760262179	Front door, 6 kW thermosiphon incl., middle bay, CMW78, WUC
760262180	Front door, 6 kW thermosiphon incl., left equipment bay, CMW78, WUC
760262181	Rear panel, right power bay, CMW78, WUC
760262182	Rear panel, Middle Bay, CMW78, WUC
760262183	Rear panel, left equipment bay, CMW78, WUC
760262240	Interlock replacement kit, CMW78, WUC, middle bay
760262241	Interlock replacement kit, CMW78, WUC, left equipment bay
760262348	Outer loop fan, 4 kW thermosiphon, CMW78, WUC
760262349	Outer loop fan, 6 kW thermosiphon, CMW78, WUC
760263865	Battery string alarm loopback (x1)

For more information contact
Senior Product Line Manager, Michael Donato
michael.donato@andrew.com

Since 1937, ANDREW, an Amphenol company, has driven the evolution of wireless technology. Trusted by mobile network operators and enterprises globally, we work closely with our customers to deliver innovative solutions that enhance connectivity experiences both outdoors and indoors. Our dedicated global team is committed to advancing the industry, fueled by the vision that a better-connected future is possible.

ANDREW®
an Amphenol company

ANDREW.COM

Visit our website or contact your local ANDREW representative for more information.

©2026 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. PG-200772-EN (10/26)