


# NHH-65C-HG-R3BD

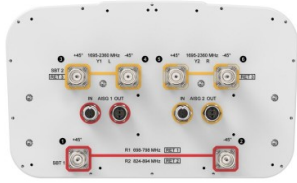

6-port Next Generation PerforMax™ sector antenna, 2x 698–894 and 4x 1695–2360 MHz, 65° HPBW, 3x RETs and 2x SBTs

- Powered by Andrew's SEED® technology (Sustainable Energy Efficient Design)
- Antenna optimized for higher gain with superior radiation efficiency
- Designed to reduce SUB 1 alarm triggers with pattern consistency between low band and mid band
- Superior patterns for enhanced interference mitigation resulting in improved SINR, higher throughput, and more capacity
- Interleaved dipole technology results into an attractive, low wind load mechanical package
- Internal SBTs allow remote RET control from the radio over the RF jumper cable
- The low band array is internally diplexed for an independent tilt at 700 MHz and 850 MHz
- Best in class PIM immunity

## General Specifications

<b>Antenna Type</b>	Sector with internal RET and bias tee
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Aluminum   Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, mid band</b>	4
<b>RF Connector Quantity, low band</b>	2
<b>RF Connector Quantity, total</b>	6

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	2 female   2 male
<b>Input Voltage</b>	10–30 Vdc

# NHH-65C-HG-R3BD

<b>Internal Bias Tee</b>	Port 1   Port 3
<b>Internal RET</b>	Low band (2)   Mid band (1)
<b>Power Consumption, active state, maximum</b>	10 W
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Protocol</b>	3GPP/AISG 2.0

## Dimensions

<b>Width</b>	350 mm   13.78 in
<b>Depth</b>	208 mm   8.189 in
<b>Length</b>	2438 mm   95.984 in
<b>Net Weight, without mounting kit</b>	36 kg   79.366 lb

## Array Layout




Array ID	Frequency (MHz)	RF Connector	RET (SPE)	AISG No.	SBT air port	SBT No.	RET UID
R1	698-798	1-2	1	AISG1	1	1	CPooooooooooooooooR1
R2	824-894	1-2	2	AISG1	1	1	CPooooooooooooooooR2
Y1	1695-2360	3-4	3	AISG2	3	2	CPooooooooooooooooY1
Y2	1695-2360	5-6	3	AISG2	3	2	CPooooooooooooooooY2

Colors of colored boxes are not true depictions of array sizes

## Port Configuration

# NHH-65C-HG-R3BD

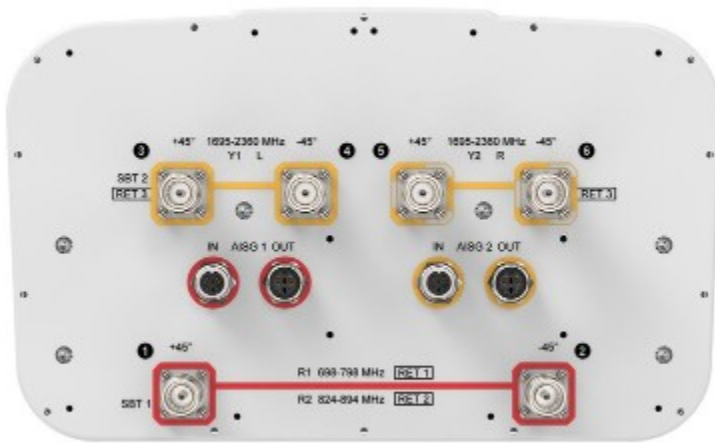

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2360 MHz   698 – 798 MHz   824 – 894 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	800 W @ 50 °C

## Electrical Specifications

	R1	R2	Y1,Y2	Y1,Y2	Y1,Y2	Y1,Y2
<b>Frequency Band, MHz</b>	<b>698–798</b>	<b>824–894</b>	<b>1695–1880</b>	<b>1850–1990</b>	<b>1920–2200</b>	<b>2200–2360</b>
<b>RF Port</b>	1,2	1,2	3,4,5,6	3,4,5,6	3,4,5,6	3,4,5,6
<b>Gain, Maximum, dBi</b>	16.7	16.3	19.5	19.9	19.9	19.9
<b>Gain, dBi</b>	16.3	16.1	19.1	19.6	19.6	19.7
<b>Beamwidth, Horizontal, degrees</b>	62	60	61	59	61	61
<b>Beamwidth, Vertical, degrees</b>	8.7	7.6	5.1	4.8	4.5	4.2
<b>Beam Tilt, degrees</b>	0–11	0–11	0–7	0–7	0–7	0–7
<b>USLS (First Lobe), dB</b>	16	15	15	18	19	20
<b>Front-to-Back Ratio at 180°, dB</b>	29	32	30	40	37	36
<b>CPR at Boresight, dB</b>	21	19	22	26	23	22
<b>Isolation, Cross Polarization,</b>	25	25	25	25	25	25

# NHH-65C-HG-R3BD

---

## dB

<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153
<b>Input Power per Port at 50°C, maximum, watts</b>	150	150	250	250	250	200

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	425.0 N @ 150 km/h (95.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	361.0 N @ 150 km/h (81.2 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	900.0 N @ 150 km/h (202.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	451.0 N @ 150 km/h (101.4 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	456 mm   17.953 in
<b>Depth, packed</b>	357 mm   14.055 in
<b>Length, packed</b>	2585 mm   101.772 in
<b>Weight, gross</b>	50.2 kg   110.672 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
UK-ROHS	Compliant

## Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---

# BSAMNT-3



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.2 kg | 13.669 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

**Weight, gross** 6.4 kg | 14.11 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

# BSAMNT-3

---

